

# START PANEL UGR19 600 4000K G4

Item No: 0047785


**SYLVANIA**



LED back-lit recessed panel (low glare: UGR<19), 4000K Neutral White, 4300lm delivered from 36W, 119lm/W total system efficiency, energy efficient external driver included as standard, even distribution of light throughout fixture, long lifetime of 50,000 hours (L70), size (HxWxD) 596x596x65mm.


## Technical Assets

### Dimensions (mm)

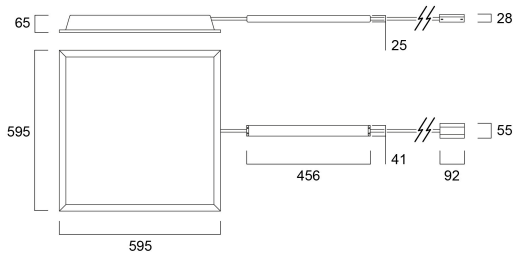

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Beam diameter [m]	Beam angle [°]	Beam diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	1.04	0.99	48.2°	0.99	48.2°	0.99	48.2°	832
			48.2°		48.2°		48.2°	134
			48.2°		48.2°		48.2°	140
1.0	2.09	1.99	48.2°	1.99	48.2°	1.99	48.2°	203
			48.2°		48.2°		48.2°	328
			48.2°		48.2°		48.2°	353
1.5	3.13	2.98	48.2°	2.98	48.2°	2.98	48.2°	899
			48.2°		48.2°		48.2°	149
			48.2°		48.2°		48.2°	151
2.0	4.17	3.97	48.2°	3.97	48.2°	3.97	48.2°	506
			48.2°		48.2°		48.2°	84
			48.2°		48.2°		48.2°	87
2.5	5.21	4.97	48.2°	4.97	48.2°	4.97	48.2°	324
			48.2°		48.2°		48.2°	54
			48.2°		48.2°		48.2°	56
3.0	6.26	5.96	48.2°	5.96	48.2°	5.96	48.2°	225
			48.2°		48.2°		48.2°	37
			48.2°		48.2°		48.2°	40

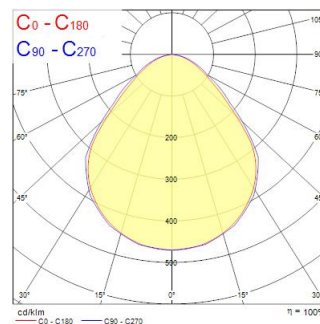

# START PANEL UGR19 600 4000K G4

Item No: 0047785

**SYLVANIA**

## General data

Product name	START PANEL UGR19 600 4000K G4
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
General application	Office, Hospitality, Retail, Education
Operating temperature range (°C)	0°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4274199
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	4300
Luminaire efficacy (lm/W)	120
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0

## Electrical data

Total power consumption (W)	36
Lamp power factor	0.97
Electrical protection	Class II
Drive current (mA)	155
Inrush Current (A)	22
Inrush Duration (µs)	250
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	38
Max. products per 13A C Breaker	48
Max. products per 16A C Breaker	60
Max. products per 20A C Breaker	75

## Lifetime data

Lifespan L70 B50	50000
------------------	-------

## Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Nominal Product Length (mm)	596
Nominal Product Width (mm)	596
Nominal Product Height (mm)	63
Weight (kg)	3.102

## Packaging

Product EAN number	5410288477855
Packaging single length / height (cm)	63.0
Packaging single width (cm)	61.5
Packaging single depth (cm)	7.6
DUN14 (inner)	05410288477855
Units per outer package	1
Packaging outer length / height (cm)	63.0
Packaging outer width (cm)	61.5
Packaging outer depth (cm)	7.6

## Safety data

Optimal operating condition (°C)	0-40
----------------------------------	------