


START PANEL IP54 MLTPWR 600 5100LM 840

Item No: 0047991


SYLVANIA

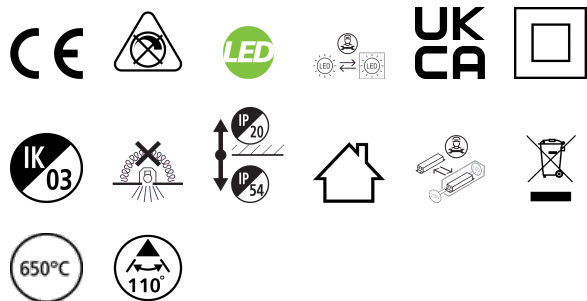

START Panel IP54 is a range of recessed integrated LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. With the help of DIP Switch multiple lumen outputs can be set up in 8 steps (13W 1825lm, 16W 2275lm, 19W 2750lm, 22W 3200lm, 26W 3750lm, 29W 4200lm, 32W 4650lm, 35W 5100lm). Max. drive current: 165mA; Max. power: 35W; Average lifespan: 100.000Hrs; 4000K; CRI 80; Efficacy up to: 146Lm/W; Fixture lumen up to: 5100lm; IK03; IP54 (from the front); Class II


Technical Assets

Dimensions (mm)

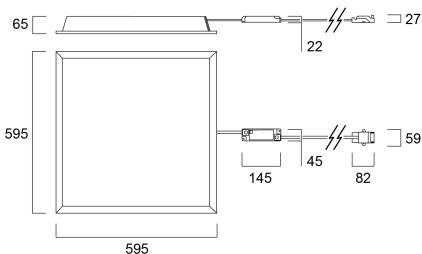

Photometrics

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	1.52	113.2°	1.52	4.99	2989
0.5	1.49	112.2°	1.49	4.86	213
0.5	1.46	111.2°	1.46	4.73	229
1.0	3.04	113.2°	3.04	9.97	642
1.0	2.98	112.2°	2.98	9.78	463
1.0	2.93	111.2°	2.93	9.61	50
1.5	4.57	113.2°	4.57	14.99	285
1.5	4.46	112.2°	4.46	14.63	24
1.5	4.35	111.2°	4.35	14.27	25
2.0	6.10	113.2°	6.10	19.99	181
2.0	5.95	112.2°	5.95	19.71	12
2.0	5.80	111.2°	5.80	19.36	14
2.5	7.62	113.2°	7.62	24.99	103
2.5	7.44	112.2°	7.44	24.41	9
2.5	7.26	111.2°	7.26	23.81	9
3.0	9.14	113.2°	9.14	29.99	71
3.0	8.93	112.2°	8.93	29.51	6
3.0	8.72	111.2°	8.72	29.01	6



START PANEL IP54 MLTPWR 600 5100LM 840

Item No: 0047991

SYLVANIA

General data

Product name	START PANEL IP54 MLTPWR 600 5100LM 840
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Built in presence detector	NONE
General application	Education, Office
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	5100
Luminaire efficacy (lm/W)	146
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	35
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	16.0
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast multiwatt
No. Of switching cycles before premature failures	>100000
Dimmable	No
Dimming method	N/A
Drive current (mA)	165
Inrush Current (A)	22
Inrush Duration (µs)	250
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	38
Max. products per 13A C Breaker	48
Max. products per 16A C Breaker	60
Max. products per 20A C Breaker	75
Max. products per 16A B Breaker	21
Connectable conductor cross section - Max (mm²)	1.5

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	71000

START PANEL IP54 MLTPWR 600 5100LM 840

Item No: 0047991



Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54/20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	65
Weight (kg)	2.36
Recessed Depth (mm)	100

Packaging

Product EAN number	5410288479910
Packaging single length / height (cm)	61.0
Packaging single width (cm)	7.0
Packaging single depth (cm)	61.0
DUN14 (inner)	05410288479910
Packaging inner length / height (cm)	63.0
Packaging inner width (cm)	61.5
Packaging inner depth (cm)	8.2
Units per outer package	4
Packaging outer length / height (cm)	63.0
Packaging outer width (cm)	33.0
Packaging outer depth (cm)	65.2

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-10-40