


Sylveo LED 30000LM RASYM 3K

Item No: 0049129


SYLVANIA

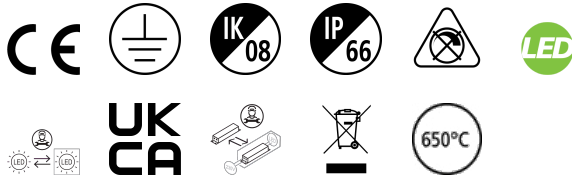


Exterior LED Floodlight, comes complete with a 1000mm cable and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 3000K, Non-dimming, 30935lm, 300W, 103lm/W, 8400mA, CRI70, 52°x117° beam angle, 50000hrs, (LxWxD) 98x648x392mm

Technical Assets

Dimensions (mm)

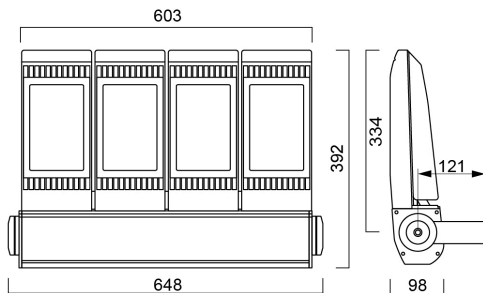

Photometrics

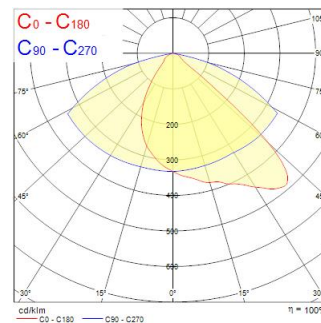

Sylveo LED 30000LM RASYM 3K

Item No: 0049129

SYLVANIA

General data

Product name	Sylveo LED 30000LM RASYM 3K
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Fixture rating	Enclosed
Environment	Internal/External
General application	Logistics & Industry
Operating temperature range (°C)	-40°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4579187
E-number SE	7763378
Warranty	5 years

Optical data

Fixture luminous flux (lm)	30935
Luminaire efficacy (lm/W)	103
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	70
Colour Variation Initial (SDCM)	SDCM6
Adjustable chromaticity	N
Beam Angle (°)	52 x 117
Glare control	< 18
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	300.4
Supply current (A)	1.304
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	8400
Inrush Current (A)	60
Inrush Duration (µs)	20
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	2
Max. products per 13A C Breaker	2
Max. products per 16A C Breaker	3
Max. products per 20A C Breaker	4
Max. products per 10A B Breaker	1
Max. products per 13A B Breaker	1
Max. products per 16A B Breaker	2
Max. products per 20A B Breaker	2
Mains surge immunity (differential mode -> L-N) (kV)	4
Mains surge immunity (common mode -> L/N - GND) (kV)	6

Lifetime data

Lifespan L70 B50	50000
Lifespan L80 B50	49000

Sylveo LED 30000LM RASYM 3K

Item No: 0049129



Physical data

Housing colour	RAL 9006 - Aluminium
IP rating	IP66
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	Glass
Nominal Product Length (mm)	648
Nominal Product Width (mm)	98
Nominal Product Height (mm)	392
Weight (kg)	15.844
Wind Area (m ²)	0.236

Packaging

Product EAN number	5410288491295
Packaging single length / height (cm)	52.7
Packaging single width (cm)	70.1
Packaging single depth (cm)	16.5
DUN14 (inner)	05410288491295
Units per outer package	1
Packaging outer length / height (cm)	52.7
Packaging outer width (cm)	70.1
Packaging outer depth (cm)	16.5

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-40-45