


RANA LINEAR S 3KLM WW OPAL

Item No: 0051278

SYLVANIA


PROTM

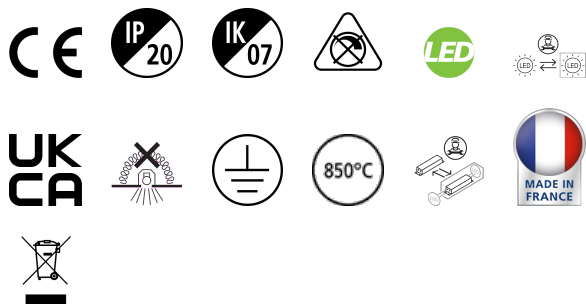

Surface or Suspended LED Linear luminaire with Opal diffuser, Dimensions: 1150mm x 87mm x 87mm, Direct, White Body, Warm White LED (3000K), 3220lm, 31W, 104lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<23, L90B10 at 50,000 hours, Electric Class1, Glow Wire Test 850°C

Technical Assets

Dimensions (mm)

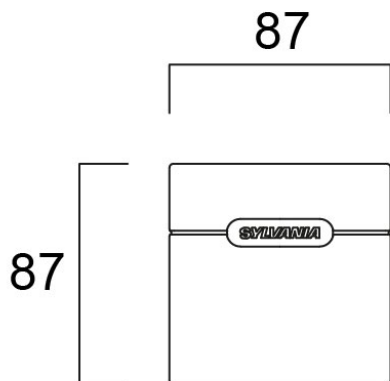


Photometrics

0.5	1.13 0.80	S/D1 S/C90 S/C0	6133 468° 38.8°	590
1.0	2.27 1.60	S/D1 S/C90 S/C0	1532 468° 38.8°	230
1.5	3.40 2.39	S/D1 S/C90 S/C0	691 468° 38.8°	99
2.0	4.54 3.18	S/D1 S/C90 S/C0	393 468° 38.8°	55
2.5	5.67 3.96	S/D1 S/C90 S/C0	245 468° 38.8°	39
3.0	6.81 4.77	S/D1 S/C90 S/C0	170 468° 38.8°	27

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 77.2°)
— C90 - C270 (Half beam angle: 97.2°)



RANA LINEAR S 3KLM WW OPAL

Item No: 0051278

SYLVANIA

General data

Product name	RANA LINEAR S 3KLM WW OPAL
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Built in presence detector	NONE
Fixture rating	Enclosed
Environment	Internal
General application	Office, Education, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
E-number SE	7502659
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3220
Luminaire efficacy (lm/W)	104
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

Electrical data

Emergency type	
Total power consumption (W)	31
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	300
Inrush Current (A)	22
Inrush Duration (µs)	250
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	40
Max. products per 13A C Breaker	51
Max. products per 16A C Breaker	63
Max. products per 20A C Breaker	80
Max. products per 10A B Breaker	15
Max. products per 13A B Breaker	31
Max. products per 16A B Breaker	25
Max. products per 20A B Breaker	48
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

RANA LINEAR S 3KLM WW OPAL

Item No: 0051278

SYLVANIA

Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B20	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B20	60000
Lifespan L80 B10	60000
Lifespan L90 B50	60000
Lifespan L90 B20	60000
Lifespan L90 B10	60000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	Not Applicable
Nominal Product Length (mm)	1150
Nominal Product Width (mm)	87
Nominal Product Height (mm)	87
Weight (kg)	2.958

Packaging

Product EAN number	5410288512785
Packaging single length / height (cm)	116.0
Packaging single width (cm)	10.3
Packaging single depth (cm)	10.0
DUN14 (inner)	5410288512785
Units per outer package	1
Packaging outer length / height (cm)	116.0
Packaging outer width (cm)	10.3
Packaging outer depth (cm)	10.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-20-40