


LED PIPE L1200 NW

Item No: 0051369


SYLVANIA

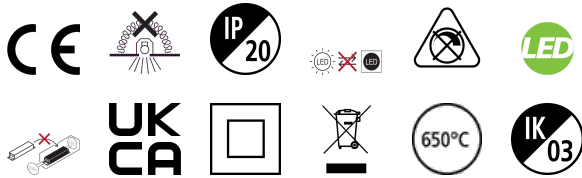


LED T5 replacement batten, seamless linking (up to 10M), ideal for direct lighting such as under cabinet or in kitchens, 120 degree beam angle, includes switch, includes 0.30m stripped cable, white polycarbonate body, includes standard and tilting brackets

Technical Assets

Dimensions (mm)

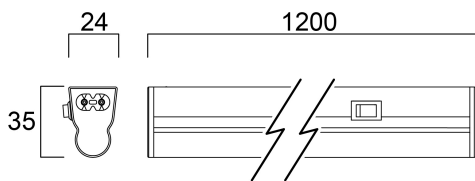

Photometrics



LED PIPE L1200 NW

Item No: 0051369

SYLVANIA

General data

Product name	LED PIPE L1200 NW
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Built in presence detector	NONE
General application	Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC000109
E-number FI	4278214
Warranty	3 years

Optical data

Fixture luminous flux (lm)	1275
Luminaire efficacy (lm/W)	111
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	120
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	11.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.7
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	100
Inrush Current (A)	100
Inrush Duration (µs)	150
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	111
Max. products per 13A C Breaker	144
Max. products per 16A C Breaker	181
Max. products per 20A C Breaker	222
Max. products per 10A B Breaker	65
Max. products per 13A B Breaker	86
Max. products per 16A B Breaker	107
Max. products per 20A B Breaker	133
Connectable conductor cross section - Max (mm ²)	1.5

Lifetime data

Lifespan L70 B50	30000
------------------	-------

LED PIPE L1200 NW

Item No: 0051369



Physical data

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	24
Nominal Product Height (mm)	35
Weight (kg)	0.17

Packaging

Product EAN number	5410288513690
Packaging single length / height (cm)	120.4
Packaging single width (cm)	4.6
Packaging single depth (cm)	3.1
DUN14 (inner)	15410288513697
Units per outer package	24
Packaging outer length / height (cm)	122.0
Packaging outer width (cm)	20.5
Packaging outer depth (cm)	21.5

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40