


RANA LINEAR R 32 4K MPO SSC01 W

Item No: 0052477

SYLVANIA


PROTM

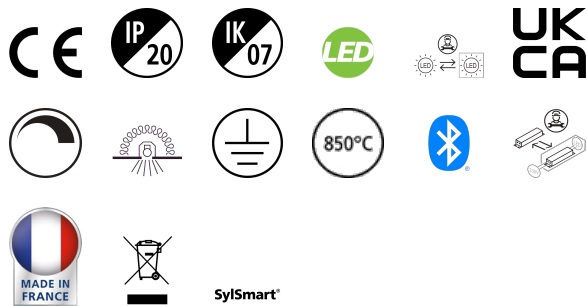



Ceiling recessed LED Linear luminaire with MicroPrismatic Optic, Dimensions: 1154mm x 90mm x 91mm, Direct, White Body, SylSmart Standalone capable, Electric Class 1, Neutral White LED (4000K), 3100lm, 32W, 97lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<21, L90B10 at 50,000 hours, Glow Wire Test 850°C, Can be covered with building insulation of Glass Wool type.

Technical Assets

Dimensions (mm)

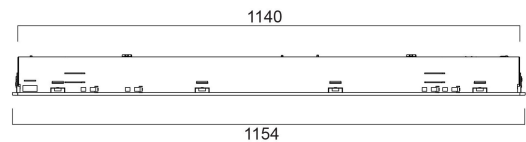

Photometrics



RANA LINEAR R 32 4K MPO SSC01 W

Item No: 0052477

SYLVANIA

General data

Product name	RANA LINEAR R 32 4K MPO SSC01 W
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Built in presence detector	NONE
Fixture rating	Enclosed
Environment	Internal
General application	Office, Education, Retail
Operating temperature range (°C)	-25°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	97
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG0

Electrical data

Emergency type	
Total power consumption (W)	32
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Standalone (SSC)
Minimum dimming level (%)	1
Drive current (mA)	600
Inrush Current (A)	20
Inrush Duration (µs)	25
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	57
Max. products per 13A C Breaker	71
Max. products per 16A C Breaker	93
Max. products per 20A C Breaker	114
Max. products per 10A B Breaker	35
Max. products per 13A B Breaker	45
Max. products per 16A B Breaker	55
Max. products per 20A B Breaker	68
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

RANA LINEAR R 32 4K MPO SSC01 W

Item No: 0052477

SYLVANIA

Lifetime data

Lifespan L70 B50	72000
Lifespan L70 B20	60000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B20	60000
Lifespan L80 B10	72000
Lifespan L90 B50	72000
Lifespan L90 B20	50000
Lifespan L90 B10	46000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Reflector finish	Not Applicable
Nominal Product Length (mm)	1150
Nominal Product Width (mm)	90
Nominal Product Height (mm)	91
Weight (kg)	3.15
Recessed Depth (mm)	90

Packaging

Product EAN number	5410288524771
Packaging single length / height (cm)	117.0
Packaging single width (cm)	10.5
Packaging single depth (cm)	11.5
DUN14 (inner)	05410288524771
Units per outer package	1
Packaging outer length / height (cm)	117.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	11.5

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-25-40