



PRO

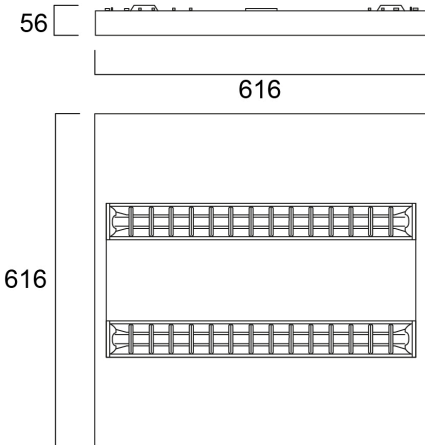

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	0.59 0.67	0.71	2.33'	9000 7860
1.0	1.18 1.33	1.42	4.66'	2273 1965
1.5	1.76 2.00	2.13	6.99'	1515 1310
2.0	2.35 2.67	2.84	9.32'	1137 985
2.5	2.94 3.33	3.55	11.65'	909 786
3.0	3.53 4.00	4.26	13.98'	732 635

Distance [m] Cone diameter [m] Beam diameter [m] Beam diameter [ft] Illuminance [lx]
 — C0 - C180 (Half beam angle: 67.4°)
 — C90 - C270 (Half beam angle: 63.2°)

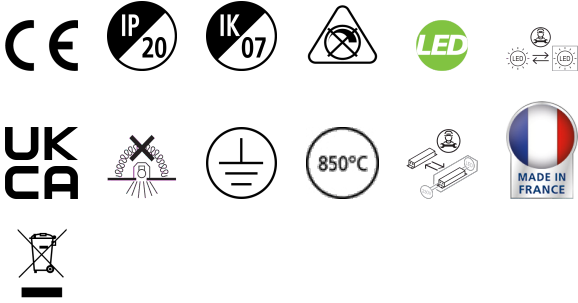