


START



0.5	1.55	20°	8° 2'	2200
1.0	3.10	20°	8° 2'	550
1.5	4.66	20°	8° 2'	246
2.0	6.21	20°	8° 2'	140
2.5	7.76	20°	8° 2'	88
3.0	9.31	20°	8° 2'	61

Distance [m] Cone diameter [m]
 — C0 - C180 (Half beam angle: 114.4°)
 Illuminance [lx]

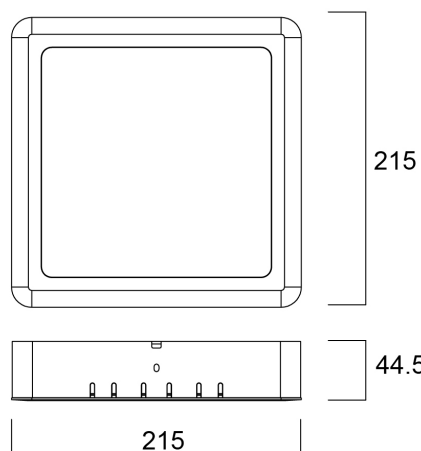