


# 100W QPar30 Single Circuit

Item No: 2041892


**Concord**

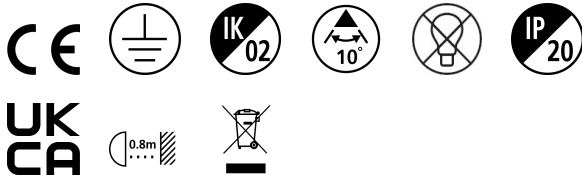

100W QPar30 Single Circuit

## Technical Assets


### Dimensions (mm)

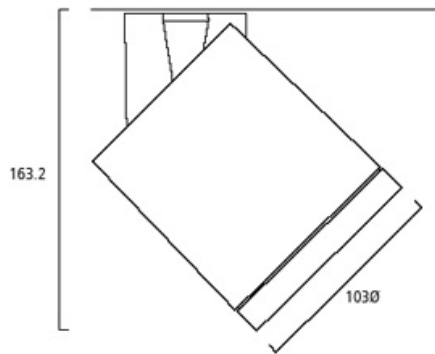

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	0.22	EPD ECCB	12.8"	1043 495
1.0	0.45	EPD ECCB	12.8"	261 123
1.5	0.67	EPD ECCB	12.8"	180 83
2.0	0.90	EPD ECCB	12.8"	65 30
2.5	1.12	EPD ECCB	12.8"	43 19
3.0	1.34	EPD ECCB	12.8"	29 13

Distance [m]      Cone diameter [m]      Beam diameter [m]      Beam diameter [ft]      Illuminance [lx]  
 C0 - C180 (Half beam angle: 25.2°)



# 100W QPar30 Single Circuit

Item No: 2041892

# Concord

## General data

Product name	100W QPar30 Single Circuit
Technology	Halogen
Housing	Aluminium
Mount	Track mounting
Environment	Interior
General application	Hospitality, Museums & Galleries, Retail
ETIM Class	EC001744
Warranty	2 years

## Optical data

Fixture luminous flux (lm)	1550
Light colour	N/A
Adjustable chromaticity	N
Beam Angle (°)	10
Distribution type	Adjustable

## Electrical data

Light source included	Fixture without Lightsource
Total power consumption (W)	100
Electrical protection	Class I
Nominal Frequency (Hz)	50/60Hz

## Lifetime data

Lifespan L70 B50	50000
------------------	-------

## Physical data

Housing colour	Silver
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	103
Nominal Product Height (mm)	163
Max. Lamp Diameter (mm) - D	103
Weight (kg)	0.49

## Packaging

Product EAN number	5025768418923
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (inner)	5025768418923
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5