


# Myriad Deco IP65 Flood 3000K DALI BLACK WBEZ

Item No: 2058897

Concord

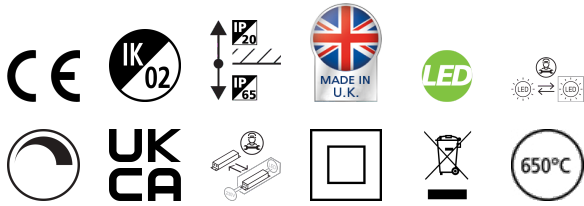


MYRD IP FL 3K DALI BLK WBEZ

## Technical Assets

Dimensions (mm)

Photometrics

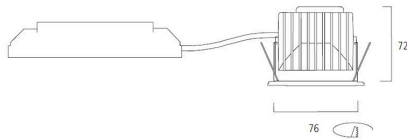

Dimensions (mm)

# Myriad Deco IP65 Flood 3000K DALI BLACK WBEZ

Item No: 2058897

## Concord

### General data

Product name	Myriad Deco IP65 Flood 3000K DALI BLACK WBEZ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Built in presence detector	NONE
Environment	Interior
General application	Hospitality, Office, Residential & Consumer, Retail
Operating temperature range (°C)	25°C...+25°C
ETIM Class	EC001744
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	1200
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Diffuse
Photobiological Risk Group	Not applicable

### Electrical data

Emergency type	
Total power consumption (W)	10
Supply current (A)	1
Primary Supply/Product voltage - min (V)	230.0
Primary Supply/Product voltage - max (V)	240.0
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	DALI-2, Switch-dim (mains-rated)
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	5
Max. products per 16A C Breaker	5

### Lifetime data

Lifespan L70 B50	50000
------------------	-------

### Physical data

Housing colour	Aluminium
IP rating	IP65/20
IK rating	IK02
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Built-in diameter (mm)	76
Weight (kg)	0.95

# Myriad Deco IP65 Flood 3000K DALI BLACK WBEZ

Item No: 2058897

## Concord

### Packaging

Product EAN number	5025768588978
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (inner)	05025768588978
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

### Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	25-25