


ASCENT 150 II 2500 3K STD

Item No: 2059356

Concord

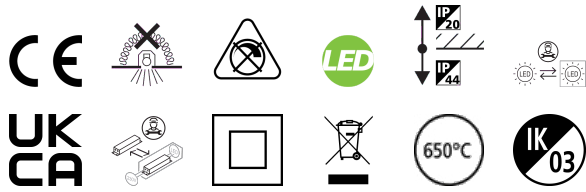

The ASCENT 150 II 2500 3K STD is a high efficient downlight luminaire , Colour rendering index Ra >80, Colour temperature: 3000K Warm white, Class II, Protection rating IP44/IK03

Technical Assets


Dimensions (mm)



Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.50	0.50	42.0°	524 1217
1.0	1.00	1.00	42.0°	131 304
1.5	1.50	1.50	42.0°	58 133
2.0	2.00	2.00	42.0°	25 58
2.5	2.50	2.50	42.0°	10 23
3.0	3.00	3.00	42.0°	4 9

Distance [m] Cone diameter [m] Beam diameter [m] Beam angle [°] Illuminance [lx]
C0 - C180 (Half beam angle: 84.0°)



ASCENT 150 II 2500 3K STD

Item No: 2059356

Concord

General data

Product name	ASCENT 150 II 2500 3K STD
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Built in presence detector	NONE
Environment	Internal
General application	Hospitality, Office, Retail
Operating temperature range (°C)	25°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001744
E-number FI	4237879
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	132
LOR (%)	100
Correlated colour temperature (k)	3000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	80
Distribution type	Diffuse
Glare control	< 22
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	19
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	700
Inrush Current (A)	16
Inrush Duration (µs)	20
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60/HF
Max. products per 16A C Breaker	80
Max. products per 10A B Breaker	16
Max. products per 16A B Breaker	25
Connectable conductor cross section - Min (mm ²)	1
Connectable conductor cross section - Max (mm ²)	1

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	60000

ASCENT 150 II 2500 3K STD

Item No: 2059356

Concord

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP44/20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Reflector finish	Other
Nominal Product Width (mm)	189
Nominal Product Height (mm)	107
Nominal Product Diameter (mm)	189
Weight (kg)	1.03
Recessed Depth (mm)	120

Packaging

Product EAN number	5025768593569
Packaging single length / height (cm)	25.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	25.0
DUN14 (inner)	05025768593569
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	25.0

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	25-25