



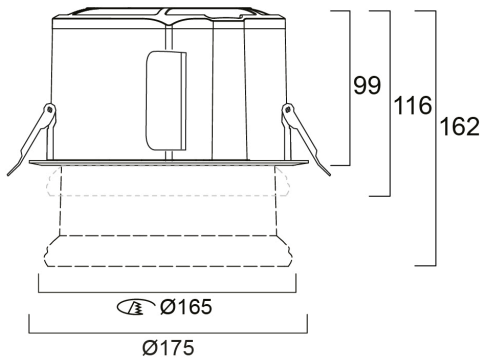

0.5	0.64	B10	32.8"	833
		E10	32.8"	1082
1.0	1.29	B10	32.8"	1331
		E10	32.8"	206
1.5	1.93	B10	32.8"	89
		E10	32.8"	175
2.0	2.58	B10	32.8"	33
		E10	32.8"	99
2.5	3.22	B10	32.8"	23
		E10	32.8"	83
3.0	3.87	B10	32.8"	14
		E10	32.8"	44

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 66.6°)

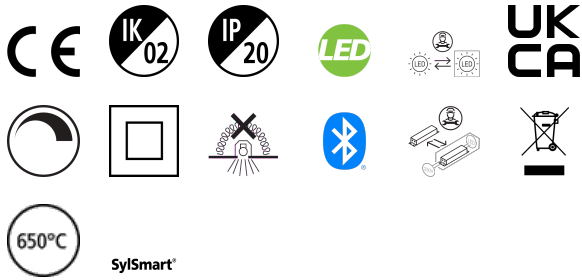