


# DOMINO 2X 940 DALI

Item No: 2061573


Concord

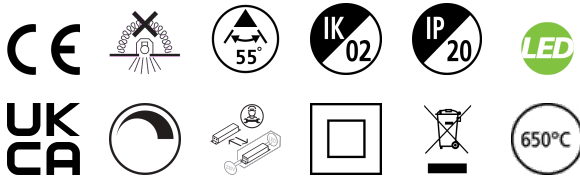


Domino is a linear spotlight solution for architectural installations in retail stores, hotels and restaurants. Domino 2x 940 consists of 2 modules delivering 372 Lumen, 4000K, CRI90, equipped with DALI driver.

## Technical Assets

### Dimensions (mm)

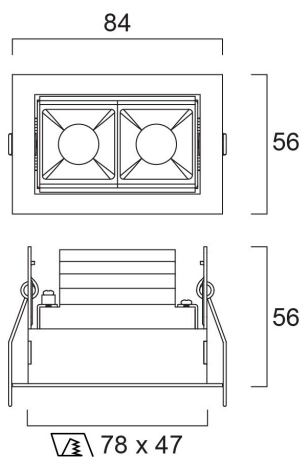

### Photometrics



# DOMINO 2X 940 DALI

Item No: 2061573

Concord

## General data

|                                  |                           |
|----------------------------------|---------------------------|
| Product name                     | DOMINO 2X 940 DALI        |
| Technology                       | LED                       |
| Cap/Base                         | N/A                       |
| Housing                          | Aluminium                 |
| Mount                            | Ceiling recessed mounting |
| Built in presence detector       | NONE                      |
| General application              | Hospitality, Retail       |
| Operating temperature range (°C) | 1°C...+40°C               |
| Virtual assistant compatibility  | N/A                       |
| ETIM Class                       | EC001744                  |
| E-number FI                      | 4278676                   |
| Warranty                         | 5 years                   |

## Optical data

|                                   |               |
|-----------------------------------|---------------|
| Fixture luminous flux (lm)        | 370           |
| Luminaire efficacy (lm/W)         | 62            |
| Correlated colour temperature (k) | 4000          |
| Light colour                      | Neutral White |
| CRI (Ra)                          | 90            |
| Colour Variation Initial (SDCM)   | SDCM3         |
| Beam Angle (°)                    | 55            |
| Distribution type                 | Symmetric     |
| Photobiological Risk Group        | RG1           |

## Electrical data

|                                                                  |                                  |
|------------------------------------------------------------------|----------------------------------|
| Emergency type                                                   |                                  |
| Total power consumption (W)                                      | 6                                |
| Supply current (A)                                               | 0.027                            |
| Primary Supply/Product voltage - min (V)                         | 220.0                            |
| Primary Supply/Product voltage - max (V)                         | 240.0                            |
| Lamp power factor                                                | 0.9                              |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x % | 15                               |
| Electrical protection                                            | Class II                         |
| Control gear type                                                | LED driver constant current      |
| Dimmable                                                         | Yes                              |
| Dimming method                                                   | DALI-2, Switch-dim (mains-rated) |
| Drive current (mA)                                               | 750                              |
| Inrush Current (A)                                               | 3.26                             |
| Inrush Duration (µs)                                             | 34                               |
| Energy Efficiency Class (A->G) of contained light source         | F                                |
| Nominal Frequency (Hz)                                           | 50/60Hz                          |
| Max. products per 10A C Breaker                                  | 38                               |
| Max. products per 16A C Breaker                                  | 60                               |
| Max. products per 16A B Breaker                                  | 60                               |
| Connectable conductor cross section - Min (mm²)                  | 0.75                             |
| Connectable conductor cross section - Max (mm²)                  | 2.5                              |

## Lifetime data

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
|------------------|--------|

# DOMINO 2X 940 DALI

Item No: 2061573

Concord

## Physical data

|                             |                         |
|-----------------------------|-------------------------|
| Housing colour              | RAL 9003 - Signal white |
| IP rating                   | IP20                    |
| IK rating                   | IK02                    |
| Diffuser finish             | Frosted                 |
| Diffuser material           | PC Polycarbonate        |
| Reflector finish            | Matt                    |
| Nominal Product Length (mm) | 84                      |
| Nominal Product Width (mm)  | 56                      |
| Nominal Product Height (mm) | 56                      |
| Weight (kg)                 | 0.27                    |

## Packaging

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5025768615735  |
| Packaging single length / height (cm) | 24.5           |
| Packaging single width (cm)           | 10.5           |
| Packaging single depth (cm)           | 6.5            |
| DUN14 (inner)                         | 15025768615732 |
| Units per outer package               | 24             |
| Packaging outer length / height (cm)  | 50.5           |
| Packaging outer width (cm)            | 33.0           |
| Packaging outer depth (cm)            | 28.0           |

## Safety data

|                                  |      |
|----------------------------------|------|
| Glow Wire Test (°C)              | 650  |
| Optimal operating condition (°C) | 1-40 |