

# Solstice 200 2150lm 940 DALI Surface Mounted WW

Item No: 2070214


**Concord**



Solstice 200 2150lm 940 DALI Surface Mounted WW - white reflector, white housing is a high efficient DALI dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 4000K Neutral White, Class II, Overall dimensions: dia 196mm, height 196mm.Finish White reflector and White housing.

## Technical Assets


### Dimensions (mm)

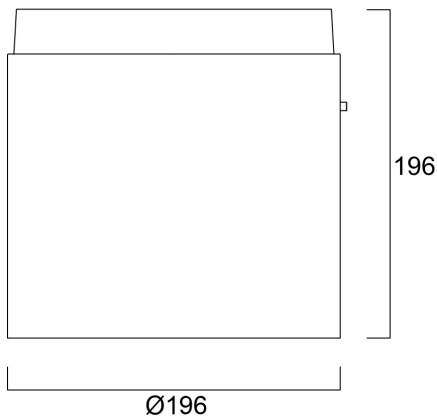

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.89	Ø196	Ø196	4902
1.0	1.78	Ø196	Ø196	1185
1.5	2.67	Ø196	Ø196	515
2.0	3.56	Ø196	Ø196	291
2.5	4.45	Ø196	Ø196	185
3.0	5.35	Ø196	Ø196	133

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 83.4°)



# Solstice 200 2150lm 940 DALI Surface Mounted WW

Item No: 2070214

# Concord

## General data

Product name	Solstice 200 2150lm 940 DALI Surface Mounted WW
Technology	LED
Cap/Base	N/A
Housing	Aluminium, PC Polycarbonate
Mount	Ceiling surface mounting
Built in presence detector	NONE
General application	Hospitality, Office, Retail
Operating temperature range (°C)	5°C...+35°C
Performance ambient temperature Tq (°C)	35
Virtual assistant compatibility	N/A
ETIM Class	EC001744
E-number FI	4170430
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	2150
Luminaire efficacy (lm/W)	134
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Distribution type	Symmetric
Glare control	< 24
Photobiological Risk Group	RG0

## Electrical data

Emergency type	
Total power consumption (W)	16
Supply current (A)	1
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2, Switch-dim (mains-rated)
Drive current (mA)	450
Inrush Current (A)	9.4
Inrush Duration (µs)	16
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	53
Max. products per 13A C Breaker	40
Max. products per 16A C Breaker	85
Max. products per 20A C Breaker	33
Max. products per 10A B Breaker	33
Max. products per 13A B Breaker	53
Max. products per 16A B Breaker	53
Max. products per 20A B Breaker	66
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.5
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

# Solstice 200 2150lm 940 DALI Surface Mounted WW

Item No: 2070214

**Concord**

## Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B50	89000
Lifespan L90 B50	42000

## Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Reflector finish	Not Applicable
Nominal Product Height (mm)	196
Nominal Product Diameter (mm)	196
Max. Lamp Diameter (mm) - D	196
Weight (kg)	2.94

## Packaging

Product EAN number	5025768702145
Packaging single length / height (cm)	27.5
Packaging single width (cm)	27.5
Packaging single depth (cm)	26.5
DUN14 (inner)	05025768702145
Units per outer package	1
Packaging outer length / height (cm)	27.5
Packaging outer width (cm)	27.5
Packaging outer depth (cm)	26.5

## Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	5-35