


QR-CB51 50W GU/GX5.3


Item No: 3021500



Technical Assets

Dimensions (mm)


70 Comfort
minimum recess dimensions:
400x400x110mm

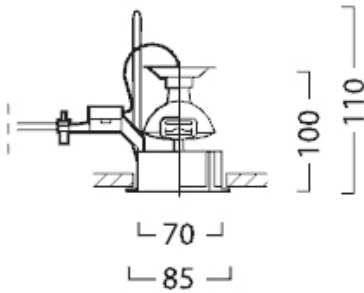

Photometrics

Distance [m]	Core diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.30	0.91	266
1.0	0.60	1.82	133
1.5	0.91	2.73	89
2.0	1.21	3.64	67
2.5	1.51	4.55	54
3.0	1.81	5.46	47

Distance [m] Core diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 33.6°)

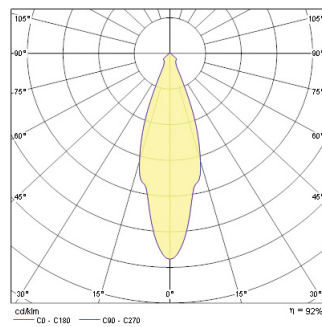

QR-CB51 50W GU/GX5.3

Item No: 3021500

General data

Product name	QR-CB51 50W GU/GX5.3
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Retail
E-number FI	4270306
E-number SE	7468515

Optical data

Adjustable chromaticity	N
Distribution type	Symmetric, Direct

Electrical data

Electrical protection	Class III
Control gear mounting	Remote

Physical data

Housing colour	White
IP rating	IP23
IK rating	IK02
Max. Lamp Diameter (mm) - D	85
Weight (kg)	0.13
Recessed Depth (mm)	110

Packaging

Product EAN number	8711971215004
Packaging single width (cm)	11.0
Packaging single depth (cm)	9.0
DUN14 (inner)	08711971215004
Packaging outer length / height (cm)	11.0

Safety data

Glow Wire Test (°C)	850
---------------------	-----