

Insaver HO Topper LED II 175 RO 15W WW

Item No: 3033936

SYLVANIA


PROTM



IP44 from the front round LED downlight with polycarbonate diffuser with a white bezel. Shallow recess depth (<65mm). Available in 12, 15, 21 & 25W in 150mm, 175mm, 205mm & 225mm cut out sizes. Perfect for up to 2x26W CFL replacement. Includes loop-in to loop-out facility for quick installation.


Technical Assets

Dimensions (mm)

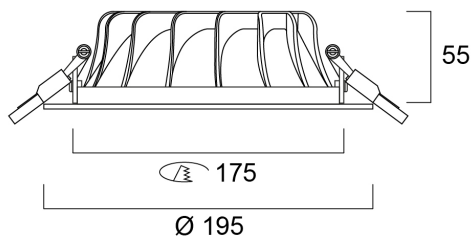

Photometrics

Distance (m)	Cone diameter (m)	Beam angle (°)	Illuminance (lx)
0.5	0.80 0.81	50° 50.8° 51.6°	3081 703 716
1.0	1.61 1.63	50° 50.8° 51.6°	763 173 179
1.5	2.41 2.44	50° 50.8° 51.6°	339 81 84
2.0	3.22 3.25	50° 50.8° 51.6°	191 46.8 48.8
2.5	4.03 4.06	50° 50.8° 51.6°	122 30.1 31.6
3.0	4.82 4.88	50° 50.8° 51.6°	88 21.5 22.5



Insaver HO Topper LED II 175 RO 15W WW

Item No: 3033936

SYLVANIA

General data

Product name	Insaver HO Topper LED II 175 RO 15W WW
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
Operating temperature range (°C)	-10°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number SE	7465676
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	100
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 24
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	15
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	390
Inrush Current (A)	7.52
Inrush Duration (µs)	830
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	10
Max. products per 13A C Breaker	14
Max. products per 16A C Breaker	17
Max. products per 20A C Breaker	20

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

Insaver HO Topper LED II 175 RO 15W WW

Item No: 3033936



Physical data

Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	195
Weight (kg)	0.537
Recessed Depth (mm)	150

Packaging

Product EAN number	8711971339366
Packaging single length / height (cm)	22.7
Packaging single width (cm)	22.9
Packaging single depth (cm)	6.2
DUN14 (inner)	18711971339363
Units per outer package	12
Packaging outer length / height (cm)	48.1
Packaging outer width (cm)	48.5
Packaging outer depth (cm)	21.1

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-10-25