


# Inverto Pend Rmt NW Eb Silver

Item No: 3080063

**SYLVANIA**


**PRO**<sup>TM</sup>

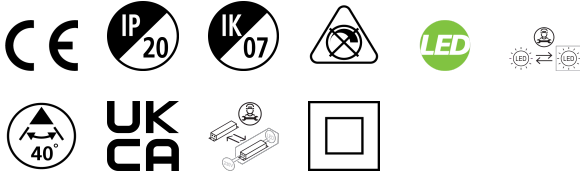

Pendant luminaire with remote driver, wire to base with pluggable connection for easy installation, suitable for looping, switchable driver, silver coloured aluminium housing, 1,617lm, 16W, 101lm/W, 4000K, 350mA , CRI:80, 40° beam Angle, non-dimmable, IP20, IK07, lifespan: 60,000hrs (L80:B20), 18.50x24.5x11.5mm.

## Technical Assets


### Dimensions (mm)

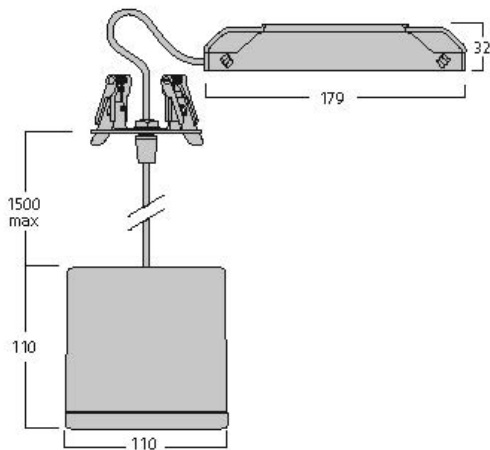

### Photometrics

Distance [m]	Cone diameter [m]	E(0°) [lx]	E(C0) [lx]	U(0°) [lx]
0.5	0.36	8107	8107	12074
1.0	0.72	2027	2027	3214
1.5	1.08	8107	8107	1442
2.0	1.44	2027	2027	811
2.5	1.80	8107	8107	519
3.0	2.16	2027	2027	360

Distance [m] Cone diameter [m] Illuminance [lx]  
 C0 - C180 (Half beam angle: 39.6°)

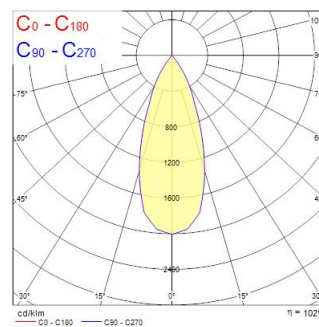

# Inverto Pend Rmt NW Eb Silver

Item No: 3080063

**SYLVANIA**

## General data

Product name	Inverto Pend Rmt NW Eb Silver
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Pendant surface
Environment	Internal
General application	Hospitality
Operating temperature range (°C)	-25°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001743
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	1617
Luminaire efficacy (lm/W)	101
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	40
Photobiological Risk Group	RG1

## Electrical data

Total power consumption (W)	16
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	45
Inrush Duration (µs)	20
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	50
Max. products per 16A C Breaker	80

## Lifetime data

Lifespan L70 B50	60000
Lifespan L80 B20	60000
Lifespan L90 B10	56100

## Physical data

Housing colour	RAL 9022 - Pearl light grey
IP rating	IP20
IK rating	IK07
Diffuser finish	Transparent
Diffuser material	Glass
Nominal Product Length (mm)	110
Nominal Product Width (mm)	110
Nominal Product Height (mm)	110
Weight (kg)	1.429

# Inverto Pend Rmt NW Eb Silver

Item No: 3080063



## Packaging

Product EAN number	8711971800637
Packaging single length / height (cm)	18.5
Packaging single width (cm)	29.6
Packaging single depth (cm)	11.5
DUN14 (inner)	08711971800637
Units per outer package	1
Packaging outer length / height (cm)	18.5
Packaging outer width (cm)	29.6
Packaging outer depth (cm)	11.5

## Safety data

Optimal operating condition (°C)	-25-25
----------------------------------	--------