

START eco Batten 1500 IP65 6000lm 840

Item No: 0045157




START™ eco



The new upgraded Start eco Batten IP65 (upgraded version of Batten LED LINK) is a versatile range of slimline LED waterproof luminaires that provide an ideal solution for interior and exterior applications such as workshops, garages and outdoor covered spaces. The design allows the luminaire to be easily linked to another luminaire through an IP65 rated connector. The product can be a slimline replacement for single and twin 36W/58W fluorescent waterproof battens. Polycarbonate housing and diffuser, 5520 lm, 48 W, 115 lm/W, 3000 K, drive current 300 mA, non dimmable, CRI 80, IP65, IK08, Class II, nominal average lifetime (h): 30000, 1500 mm x 80 mm x 53.6 mm, energy class: A++ A+ A.

Technical Assets

Dimensions (mm)

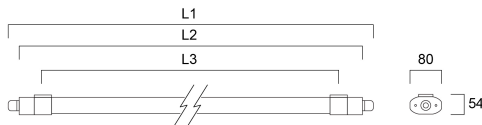


Version	L1	L2	L3
Single	1291	1246	1078
Twin	1253	1200	1078
Single	1588	1543	1378
Twin	1553	1500	1378

Photometrics

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	2.16	633
	1.44	232
	1.44	232
1.0	4.33	158
	2.88	15
	2.88	15
1.5	6.48	70.4
	4.32	88.8
	4.32	88.8
2.0	8.65	39.6
	5.76	13
	5.76	13
2.5	10.82	28.3
	7.19	9
	7.19	24
3.0	12.99	19.9
	8.63	8
	8.63	16

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 150.4°)
— C90 - C270 (Half beam angle: 130.4°)



START eco Batten 1500 IP65 6000lm 840

Item No: 0045157

SYLVANIA

General data

Product name	START eco Batten 1500 IP65 6000lm 840
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Residential & Consumer
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
E-number FI	4274238
E-number SE	7214472
Warranty	3 years

Optical data

Fixture luminous flux (lm)	6000
Luminaire efficacy (lm/W)	125
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Glare control	< 26
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	48
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	300
Inrush Current (A)	16
Inrush Duration (µs)	250
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	28
Max. products per 13A C Breaker	37
Max. products per 16A C Breaker	47
Max. products per 20A C Breaker	58

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	White
IP rating	IP65
IK rating	IK08
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	80
Nominal Product Height (mm)	53.6
Weight (kg)	1.357

START eco Batten 1500 IP65 6000lm 840

Item No: 0045157



Packaging

Product EAN number	5410288451572
Packaging single length / height (cm)	159.47
Packaging single width (cm)	9.37
Packaging single depth (cm)	6.2
DUN14 (inner)	15410288451579
Units per outer package	9
Packaging outer length / height (cm)	161.1
Packaging outer width (cm)	32.2
Packaging outer depth (cm)	21.9

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-10-40