


# SUP LED G3 1500MM S 4K D EMPRO

Item No: 0049152


**SYLVANIA**

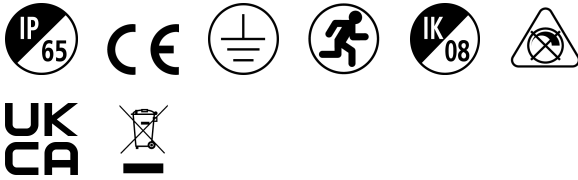

Sylproof Superia, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. L 1578 mm x W 84 mm x H 75 mm size, Polycarbonate housing, Polycarbonate diffuser, Non dimmable, 3 hour emergency, 4000K, CRI80, 5050 lm, 37 W, 136 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I,IK08, IP65.

## Technical Assets


### Dimensions (mm)

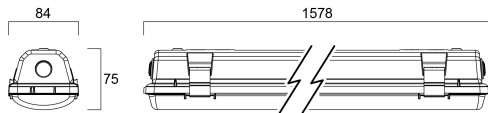

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	1.36 1.25	0.71 0.65	1133 134 134
1.0	2.71 2.51	1.42 1.30	287 91 91
1.5	4.07 3.76	2.13 1.95	132 14 16
2.0	5.43 5.01	2.84 2.61	74 9 9
2.5	6.78 6.26	3.55 3.27	48 6 6
3.0	8.14 7.52	4.26 3.93	33 3 3

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 — C0 - C180 (Half beam angle: 102.3°)  
 — C90 - C270 (Half beam angle: 107.2°)



# SUP LED G3 1500MM S 4K D EMPRO

Item No: 0049152

**SYLVANIA**

## General data

Product name	SUP LED G3 1500MM S 4K D EMPRO
Technology	LED
Housing	PC Polycarbonate
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	0°C...+30°C
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	5050
Correlated colour temperature (k)	4000
CRI (Ra)	80
Luminous flux (emergency) (lm)	829

## Electrical data

Emergency duration (h)	3
Total power consumption (W)	37
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	300
Nominal Frequency (Hz)	50/60Hz

## Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Weight (kg)	2.7

## Packaging

Product EAN number	5410288491523
Packaging single length / height (cm)	167.2
Packaging single width (cm)	8.8
Packaging single depth (cm)	8.4
DUN14 (inner)	05410288491523
Units per outer package	1
Packaging outer length / height (cm)	167.2
Packaging outer width (cm)	8.8
Packaging outer depth (cm)	8.4

## Safety data

Optimal operating condition (°C)	0-30
Dry applications use only	No