


Myriad Housing 2700K DALI

Item No: 2057922


Concord

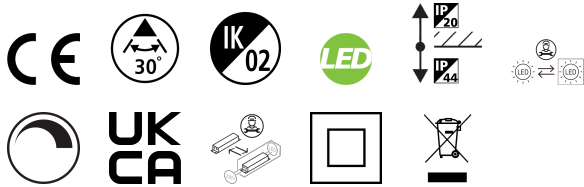

MYRIAD HOUSING 2700K DALI

Technical Assets

Dimensions (mm)

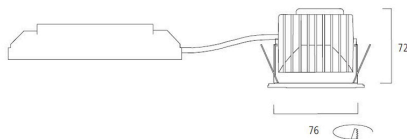


Dimensions (mm)

Photometrics

| Distance [m] | Cone diameter [m] | Beam diameter [m] | Beam diameter [ft] | Illuminance [lx] |
|--------------|-------------------|-------------------|--------------------|------------------|
| 0.5 | 0.33 | 511 | 16.8' | 541 |
| 1.0 | 0.67 | 128 | 16.8' | 216 |
| 1.5 | 1.00 | 571 | 16.8' | 91 |
| 2.0 | 1.34 | 321 | 16.8' | 45 |
| 2.5 | 1.67 | 206 | 16.8' | 29 |
| 3.0 | 2.01 | 143 | 16.8' | 19 |

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 37.0°)

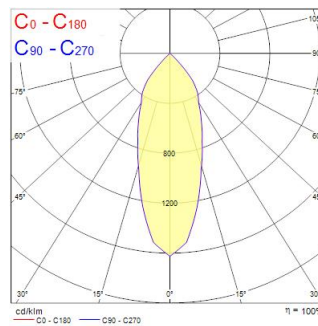

Myriad Housing 2700K DALI

Item No: 2057922

Concord

General data

| | |
|---------------------|-----------------------------|
| Product name | Myriad Housing 2700K DALI |
| Technology | LED |
| Cap/Base | N/A |
| Environment | Interior |
| General application | Hospitality, Office, Retail |
| ETIM Class | EC001744 |
| Warranty | 5 years |

Optical data

| | |
|-----------------------------------|-------------|
| Fixture luminous flux (lm) | 791 |
| Luminaire efficacy (lm/W) | 79 |
| LOR (%) | 100 |
| Correlated colour temperature (k) | 2700 |
| Light colour | Candlelight |
| CRI (Ra) | 85 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Adjustable chromaticity | N |
| Beam Angle (°) | 30 |
| Photobiological Risk Group | RG1 |

Electrical data

| | |
|--|----------------------------------|
| Total power consumption (W) | 10 |
| Primary Supply/Product voltage - min (V) | 230 |
| Primary Supply/Product voltage - max (V) | 240 |
| Electrical protection | Class II |
| Dimmable | Yes |
| Dimming method | DALI-2, Switch-dim (mains-rated) |
| Drive current (mA) | 350 |
| Energy Efficiency Class (A->G) of contained light source | E |
| Nominal Frequency (Hz) | 50/60Hz |

Lifetime data

| | |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
| Lifespan L80 B20 | 100000 |
| Lifespan L90 B10 | 68500 |

Physical data

| | |
|-------------------------------|---------|
| IP rating | IP44/20 |
| IK rating | IK02 |
| Nominal Product Height (mm) | 72 |
| Nominal Product Diameter (mm) | 76 |
| Recessed Depth (mm) | 72 |

Packaging

| | |
|---------------------------------------|----------------|
| Product EAN number | 5025768579228 |
| Packaging single length / height (cm) | 17.5 |
| Packaging single width (cm) | 17.5 |
| Packaging single depth (cm) | 15.0 |
| DUN14 (inner) | 05025768579228 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 17.5 |
| Packaging outer width (cm) | 17.5 |
| Packaging outer depth (cm) | 15.0 |