


# MYRIAD DECO IP65 FLOOD 4000K DALI BLACK CBEZ

Item No: 2058973


Concord

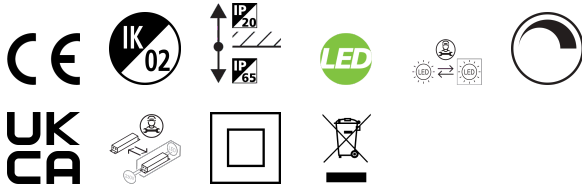

MYRD IP FL 4K DALI BLK CBEZ

## Technical Assets

### Dimensions (mm)

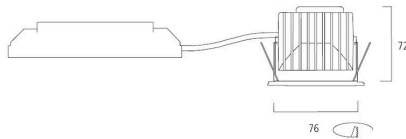


Dimensions (mm)

### Photometrics

| Distance [m] | Cone diameter [m] | Beam diameter [m] | Beam diameter [ft] | Illuminance [lx] |
|--------------|-------------------|-------------------|--------------------|------------------|
| 0.5          | 0.32              | 500               | 17.4'              | 836              |
| 1.0          | 0.63              | 2096              | 31.0'              | 206              |
| 1.5          | 0.96              | 912               | 43.0'              | 135              |
| 2.0          | 1.27              | 524               | 33.9'              | 101              |
| 2.5          | 1.58              | 335               | 24.8'              | 65               |
| 3.0          | 1.90              | 233               | 18.0'              | 47               |

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 35.2°)



# MYRIAD DECO IP65 FLOOD 4000K DALI BLACK CBEZ

Item No: 2058973

## Concord

### General data

|   |   |
|---|---|
| Product name                            | MYRIAD DECO IP65 FLOOD 4000K DALI BLACK CBEZ        |
| Technology                              | LED   |
| Cap/Base                                | N/A   |
| Housing                                 | Aluminium   |
| Mount                                   | Ceiling recessed mounting                           |
| Environment                             | Interior  |
| General application                     | Hospitality, Office, Residential & Consumer, Retail |
| Performance ambient temperature Tq (°C) | 25  |
| ETIM Class                              | EC001744  |
| Warranty                                | 5 years   |

### Optical data

|                                   |               |
|-----------------------------------|---------------|
| Fixture luminous flux (lm)        | 977           |
| Luminaire efficacy (lm/W)         | 98            |
| LOR (%)                           | 100           |
| Correlated colour temperature (k) | 4000          |
| Light colour                      | Neutral White |
| CRI (Ra)                          | 90            |
| Colour Variation Initial (SDCM)   | SDCM3         |
| Adjustable chromaticity           | N             |
| Beam Angle (°)                    | 46            |
| Photobiological Risk Group        | RG1           |

### Electrical data

|  |                                  |
|--|----------------------------------|
| Total power consumption (W)                              | 10                               |
| Primary Supply/Product voltage - min (V)                 | 230                              |
| Primary Supply/Product voltage - max (V)                 | 240                              |
| Electrical protection                                    | Class II                         |
| Control gear type  | Electronic ballast               |
| Dimmable   | Yes                              |
| Dimming method   | DALI-2, Switch-dim (mains-rated) |
| Minimum dimming level (%)                                | 1                                |
| Drive current (mA)                                       | 250                              |
| Energy Efficiency Class (A->G) of contained light source | E                                |
| Nominal Frequency (Hz)                                   | 50/60Hz                          |

### Lifetime data

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
| Lifespan L80 B20 | 100000 |
| Lifespan L90 B10 | 68500  |

### Physical data

|                               |                 |
|-------------------------------|-----------------|
| Housing colour                | Black           |
| IP rating                     | IP65/20         |
| IK rating                     | IK02            |
| Diffuser finish               | Bezel (or Ring) |
| Nominal Product Height (mm)   | 72              |
| Nominal Product Diameter (mm) | 90              |
| Weight (kg)                   | 0.44            |
| Recessed Depth (mm)           | 72              |

# MYRIAD DECO IP65 FLOOD 4000K DALI BLACK CBEZ

---

Item No: 2058973

**Concord**

---

## Packaging

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5025768589739  |
| Packaging single length / height (cm) | 17.5           |
| Packaging single width (cm)           | 15.0           |
| Packaging single depth (cm)           | 17.5           |
| DUN14 (inner)                         | 05025768589739 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 17.5           |
| Packaging outer width (cm)            | 15.0           |
| Packaging outer depth (cm)            | 17.5           |