


ASCENT 150 II 3900 4K STD

Item No: 2059368

Concord

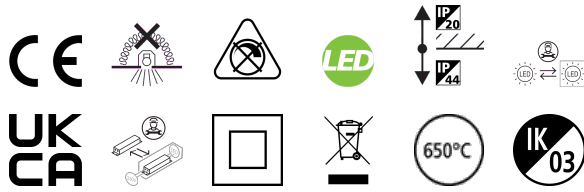

The ASCENT 150 II 3900 4K STD is a high efficient downlight luminaire, Colour rendering index Ra >80, Colour temperature: 4000K Neutral White, Class II, Protection rating IP44/IK03

Technical Assets


Dimensions (mm)



Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.50	0.50	42.1°	8055 1884
1.0	1.01	1.01	42.1°	2014 471
1.5	1.51	1.51	42.1°	886 209
2.0	2.01	2.01	42.1°	503 118
2.5	2.51	2.51	42.1°	322 78
3.0	3.01	3.01	42.1°	224 52

Distance [m] Cone diameter [m] Beam diameter [m] Beam angle [°] Illuminance [lx]
 C0 - C180 (Half beam angle: 84.2°)



ASCENT 150 II 3900 4K STD

Item No: 2059368

Concord

General data

Product name	ASCENT 150 II 3900 4K STD
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Built in presence detector	NONE
Environment	Internal
General application	Hospitality, Office, Retail
Operating temperature range (°C)	25°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3900
Luminaire efficacy (lm/W)	139
LOR (%)	100
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	80
Distribution type	Diffuse
Glare control	< 23
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	28
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	1050
Inrush Current (A)	10
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60/HF
Max. products per 10A C Breaker	35
Max. products per 13A C Breaker	50
Max. products per 16A C Breaker	65
Max. products per 20A C Breaker	75
Max. products per 10A B Breaker	35
Max. products per 13A B Breaker	50
Max. products per 16A B Breaker	65
Max. products per 20A B Breaker	75
Connectable conductor cross section - Min (mm ²)	1
Connectable conductor cross section - Max (mm ²)	1

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	55000

ASCENT 150 II 3900 4K STD

Item No: 2059368

Concord

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP44/20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Reflector finish	Other
Nominal Product Width (mm)	189
Nominal Product Height (mm)	107
Nominal Product Diameter (mm)	189
Weight (kg)	1.03
Recessed Depth (mm)	120

Packaging

Product EAN number	5025768593682
Packaging single length / height (cm)	25.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	25.0
DUN14 (inner)	05025768593682
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	25.0

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	25-25