


Solstice 68 545lm 930 DIM BB

Item No: 2060820


Concord

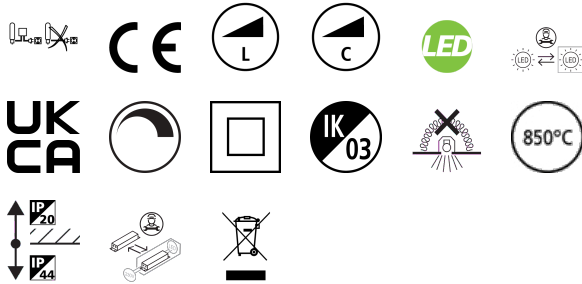

The Solstice 68 545lm 930 DIM BB is a high efficient phase dimmable downlight luminaire, black reflector, black bezel, Colour rendering index Ra>90, Colour temperature: 3000K Warm White, Class II, Protection rating IP44/IP20, Cut out dimensions: 68mm

Technical Assets


Dimensions (mm)

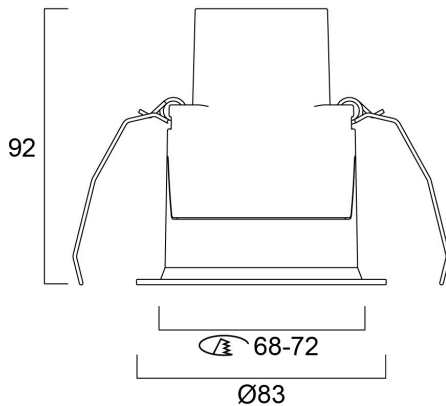

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.69	Ø101	2205
1.0	1.31	Ø190	552
1.5	1.96	Ø272	245
2.0	2.62	Ø350	135
2.5	3.27	Ø425	85
3.0	3.93	Ø500	61

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 66.4°)



Solstice 68 545lm 930 DIM BB

Item No: 2060820

Concord

General data

Product name	Solstice 68 545lm 930 DIM BB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Built in presence detector	NONE
General application	Hospitality, Retail
Operating temperature range (°C)	5°C...+35°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
E-number FI	4170463
Warranty	5 years

Optical data

Fixture luminous flux (lm)	545
Luminaire efficacy (lm/W)	55
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Beam Angle (°)	66
Distribution type	Symmetric
Glare control	< 20
Photobiological Risk Group	RG0

Electrical data

Emergency type	
Total power consumption (W)	10
Supply current (A)	1
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	0.2
Electrical protection	Class II
Control gear required	Yes
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Drive current (mA)	250
Inrush Current (A)	10
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	81
Max. products per 16A C Breaker	131
Max. products per 10A B Breaker	51
Max. products per 16A B Breaker	82
Connectable conductor cross section - Min (mm ²)	0.5
Connectable conductor cross section - Max (mm ²)	1.5

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B50	100000
Lifespan L90 B50	56000

Solstice 68 545lm 930 DIM BB

Item No: 2060820

Concord

Physical data

Housing colour	RAL 9004 - Signal black
IP rating	IP44/20
IK rating	IK03
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Height (mm)	92
Nominal Product Diameter (mm)	83
Built-in diameter (mm)	68
Weight (kg)	0.4

Packaging

Product EAN number	5025768608201
Packaging single length / height (cm)	10.0
Packaging single width (cm)	13.0
Packaging single depth (cm)	16.0
DUN14 (inner)	05025768608201
Units per outer package	1
Packaging outer length / height (cm)	10.0
Packaging outer width (cm)	13.0
Packaging outer depth (cm)	16.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	5-35