


# CONTINUUM PLUS 3.0 940 CO UGR DI DALI EM W

Item No: 2064815


Concord

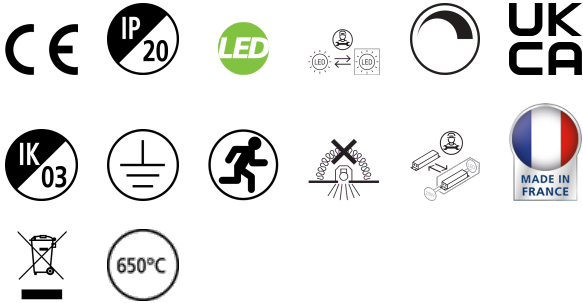

CONTINUUM PLUS 3.0 940 CO UGR DI DALI EM W is a linear luminaire with trimless body for suspended mounting, various mounting accessories, direct/indirect light distribution (60/40 ratio), compact and minimalist design, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, white (RAL9016) finishing, extruded aluminium body, 3005x56x85mm dimensions, prismatic diffuser combined with lenses, 4000K (neutral white) colour temperature, total system power: 93W, total fixture output: 13350lm, luminaire efficacy: 144lm/W, colour rendering: Ra >90, LED Chromacity: 3 step MacAdam ellipse, lifespan: 89,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, drive current: 2125mA, electronic driver, DALI dimmable, 3-hours LiFePO4 integrated DALI Self Test emergency, direct/indirect independently addressable, Class I electrical protection, IP20, IK03, suitable for internal environment only. The product is delivered without diffuser, end cap, suspension or power supply kit, the accessories eg rolled diffuser (2064607) to be ordered separately.

## Technical Assets

### Dimensions (mm)

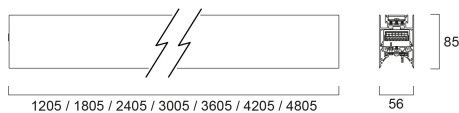

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.73	0.71	E171 24120 E1290 36.1" 6400 E100 35.3" 6960
	1.46	1.42	E171 6030 E1290 36.1" 1872 E100 35.3" 1972
1.0	2.19	2.12	E171 3080 E1290 36.1" 712 E100 35.3" 744
	2.92	2.83	E171 1807 E1290 36.1" 451 E100 35.3" 478
1.5	3.65	3.54	E171 966 E1290 36.1" 258 E100 35.3" 288
	4.38	4.25	E171 670 E1290 36.1" 178 E100 35.3" 196
2.0	4.38	4.25	E171 670 E1290 36.1" 178 E100 35.3" 196
	5.11	4.94	E171 450 E1290 36.1" 125 E100 35.3" 136
2.5	5.11	4.94	E171 450 E1290 36.1" 125 E100 35.3" 136
	5.84	5.63	E171 315 E1290 36.1" 88 E100 35.3" 94
3.0	5.84	5.63	E171 315 E1290 36.1" 88 E100 35.3" 94
	6.57	6.32	E171 225 E1290 36.1" 63 E100 35.3" 68



# CONTINUUM PLUS 3.0 940 CO UGR DI DALI EM W

Item No: 2064815

**Concord**

## General data

Product name	CONTINUUM PLUS 3.0 940 CO UGR DI DALI EM W
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Office, Education, Retail
Operating temperature range (°C)	1°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	13350
Luminaire efficacy (lm/W)	144
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	270

## Electrical data

Emergency mode	Maintained
Emergency type	
Emergency duration (h)	3
Total power consumption (W)	93
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.97
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Minimum dimming level (%)	1
Drive current (mA)	2125
Inrush Current (A)	29
Inrush Duration (µs)	180
Energy Efficiency Class (A->G) of contained light source	C, B(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.75
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

# CONTINUUM PLUS 3.0 940 CO UGR DI DALI EM W

Item No: 2064815

Concord

## Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B50	89000

## Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Reflector finish	Not Applicable
Nominal Product Length (mm)	3005
Nominal Product Width (mm)	56
Nominal Product Height (mm)	85
Weight (kg)	8.4

## Packaging

Product EAN number	5025768648153
Packaging single length / height (cm)	311.0
Packaging single width (cm)	11.7
Packaging single depth (cm)	14.7
DUN14 (inner)	05025768648153
Units per outer package	1
Packaging outer length / height (cm)	311.0
Packaging outer width (cm)	11.7
Packaging outer depth (cm)	14.7

## Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	1-25