


# INSAVER 150 HE TOPPER LED WW PIR PLUS3

Item No: 3033924

**SYLVANIA**


**PRO**<sup>TM</sup>

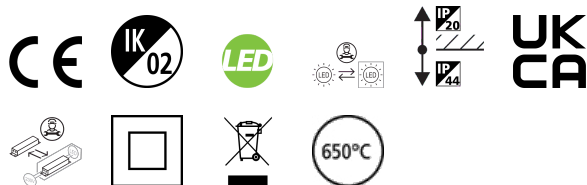

Insaver HE Topper is a ceiling recessed LED downlight with integrated PIR sensor with time (up to 8 mins) and daylight lux level settings. Die-cast aluminium body, Non dimmable LED driver, 8W, 740lm, 93lm/W, 3000K, shallow recessed depth of 55mm. Wieland GST compatible.

## Technical Assets


### Dimensions (mm)

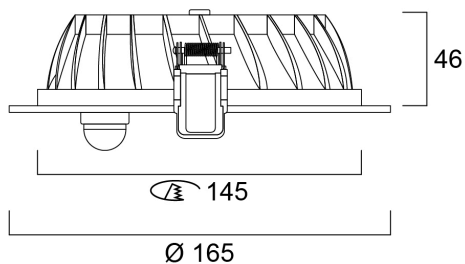

### Photometrics

Distance [m]	Cone diameter [m]	E171 E271	180° 35.4°	180° 55°
0.5	0.71	199	180°	55°
1.0	1.42	49	180°	102°
1.5	2.13	21	180°	151°
2.0	2.84	12	180°	200°
2.5	3.55	7	180°	249°
3.0	4.26	4	180°	298°

Distance [m] Cone diameter [m]  
 — C0 - C180 (Half beam angle: 70.8°)  
 Illuminance [lx]



# INSAVER 150 HE TOPPER LED WW PIR PLUS3

Item No: 3033924

**SYLVANIA**

## General data

Product name	INSAVER 150 HE TOPPER LED WW PIR PLUS3
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	External
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
Warranty	3 years

## Optical data

Fixture luminous flux (lm)	740
Luminaire efficacy (lm/W)	93
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Adjustable chromaticity	N
Beam Angle (°)	64

## Electrical data

Total power consumption (W)	8
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear type	Electronic ballast
Dimming method	N/A
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	E

## Physical data

Housing colour	White
IP rating	IP44/20
IK rating	IK02
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	Other
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	165
Weight (kg)	0.7

## Packaging

Product EAN number	8711971339243
Packaging single length / height (cm)	25.0
Packaging single width (cm)	17.0
Packaging single depth (cm)	14.0
DUN14 (inner)	18711971339240
Units per outer package	12
Packaging outer length / height (cm)	78.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	31.0

## Safety data

Glow Wire Test (°C)	650
---------------------	-----