
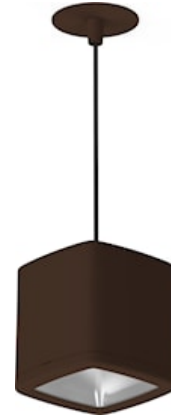


Inverto Pend Rmt NW Eb Rust

Item No: 3080064

SYLVANIA


PROTM

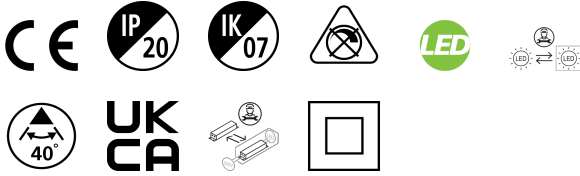

Pendant luminaire with remote driver, wire to base with pluggable connection for easy installation, suitable for looping, switchable driver, rust coloured aluminium housing, 1,617lm, 16W, 101lm/W, 4000K, 350mA, CRI:80, 40° beam Angle, non-dimmable, IP20, IK07, lifespan: 60,000hrs (L80:B20), 18.50x24.5x11.5mm.

Technical Assets


Dimensions (mm)

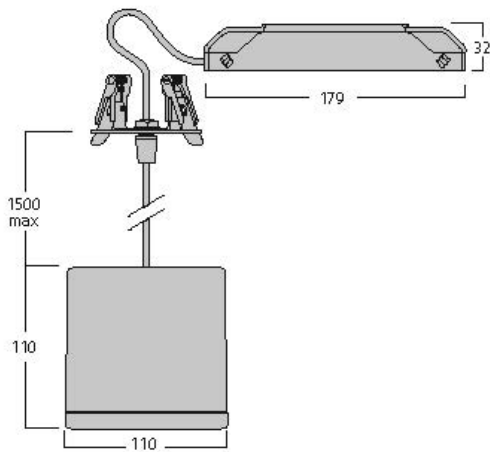

Photometrics

| Distance [m] | Cone diameter [m] | E10° | E10° | E10° |
|--------------|-------------------|------|------|-------|
| 0.5 | 0.36 | 810° | 810° | 12074 |
| | | 810° | 810° | 8424 |
| 1.0 | 0.72 | 810° | 810° | 3244 |
| | | 810° | 810° | 1268 |
| 1.5 | 1.08 | 810° | 810° | 1442 |
| | | 810° | 810° | 603 |
| 2.0 | 1.44 | 810° | 810° | 811 |
| | | 810° | 810° | 359 |
| 2.5 | 1.80 | 810° | 810° | 519 |
| | | 810° | 810° | 217 |
| 3.0 | 2.16 | 810° | 810° | 360 |
| | | 810° | 810° | 151 |

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 39.6°)



Inverto Pend Rmt NW Eb Rust

Item No: 3080064

SYLVANIA

General data

| | |
|---|-----------------------------|
| Product name | Inverto Pend Rmt NW Eb Rust |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Pendant surface |
| Environment | Internal |
| General application | Hospitality |
| Operating temperature range (°C) | -25°C...+25°C |
| Performance ambient temperature Tq (°C) | 25 |
| ETIM Class | EC001743 |
| Warranty | 5 years |

Optical data

| | |
|-----------------------------------|---------------|
| Fixture luminous flux (lm) | 1617 |
| Luminaire efficacy (lm/W) | 101 |
| LOR (%) | 100 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Adjustable chromaticity | N |
| Beam Angle (°) | 40 |
| Photobiological Risk Group | RG1 |

Electrical data

| | |
|--|--------------------|
| Total power consumption (W) | 16 |
| Primary Supply/Product voltage - min (V) | 220 |
| Primary Supply/Product voltage - max (V) | 240 |
| Electrical protection | Class II |
| Control gear type | Electronic ballast |
| Dimmable | No |
| Dimming method | N/A |
| Drive current (mA) | 350 |
| Inrush Current (A) | 45 |
| Inrush Duration (µs) | 20 |
| Energy Efficiency Class (A->G) of contained light source | D |
| Nominal Frequency (Hz) | 50/60Hz |
| Max. products per 10A C Breaker | 50 |
| Max. products per 16A C Breaker | 80 |

Lifetime data

| | |
|------------------|-------|
| Lifespan L70 B50 | 60000 |
| Lifespan L80 B20 | 60000 |
| Lifespan L90 B10 | 56100 |

Physical data

| | |
|-----------------------------|-------------|
| IP rating | IP20 |
| IK rating | IK07 |
| Diffuser finish | Transparent |
| Diffuser material | Glass |
| Nominal Product Length (mm) | 110 |
| Nominal Product Width (mm) | 110 |
| Nominal Product Height (mm) | 110 |
| Weight (kg) | 1.429 |

Inverto Pend Rmt NW Eb Rust

Item No: 3080064



Packaging

| | |
|---------------------------------------|----------------|
| Product EAN number | 8711971800644 |
| Packaging single length / height (cm) | 18.5 |
| Packaging single width (cm) | 29.6 |
| Packaging single depth (cm) | 11.5 |
| DUN14 (inner) | 08711971800644 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 18.5 |
| Packaging outer width (cm) | 29.6 |
| Packaging outer depth (cm) | 11.5 |

Safety data

| | |
|----------------------------------|--------|
| Optimal operating condition (°C) | -25-25 |
|----------------------------------|--------|