


TARG/ROUND MEDIUM 4650LM COB LED 3K AL

Item No: 4070589


Concord

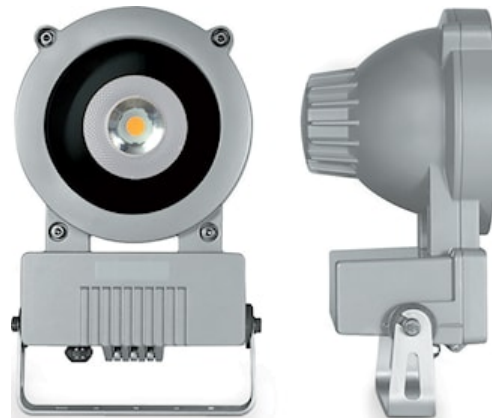

LED Exterior floodlight, Corrosion resistant die-cast aluminium body. Aluminium mounting bracket., 4650lm, 43W, 108lm/W, 3000K, CRI80+, non dimmable, IP66, IK08, (HxWxD) 200x163x345mm, 3 step Mac Adam Ellipse, 4kg, aluminium grey, Classe I, 220-240V, energy class : A++, A+, A

Technical Assets


Dimensions (mm)

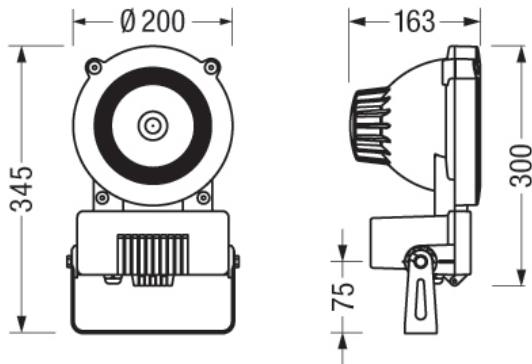

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.29	0.29	16.1°	4068 16163
1.0	0.58	0.58	16.1°	1027 4042
1.5	0.87	0.87	16.1°	454 2019
2.0	1.15	1.15	16.1°	287 1139
2.5	1.44	1.44	16.1°	183 727
3.0	1.73	1.73	16.1°	136 558

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 32.2°)

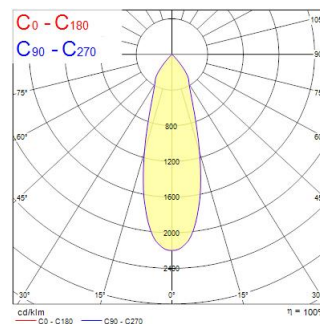

TARG/ROUND MEDIUM 4650LM COB LED 3K AL

Item No: 4070589

Concord

General data

Product name	TARG/ROUND MEDIUM 4650LM COB LED 3K AL
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted, Ground mounted
Environment	External
General application	Office, Hospitality, Retail, Logistics & Industry, Education, Museums & Galleries
ETIM Class	EC001744
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4650
Luminaire efficacy (lm/W)	108
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	32
Photobiological Risk Group	RG1

Electrical data

Electrical protection	Class I
Dimmable	No
Nominal Frequency (Hz)	50Hz

Lifetime data

Lifespan L80 B10	50000
------------------	-------

Physical data

Housing colour	RAL 9007 - Aluminium grey
IP rating	IP66
IK rating	IK08
Nominal Product Length (mm)	163
Nominal Product Width (mm)	200
Nominal Product Height (mm)	345
Weight (kg)	4.0

Packaging

Product EAN number	5026524705899
Packaging single length / height (cm)	33.0
Packaging single width (cm)	24.0
Packaging single depth (cm)	20.0
DUN14 (inner)	05026524705899
Units per outer package	1
Packaging outer length / height (cm)	33.0
Packaging outer width (cm)	24.0
Packaging outer depth (cm)	20.0