

Pixo Line 1500mm Double Assymmetric 840 Negro

Item No: 0007834

SYLVANIA


PROTM



Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps, traslucent double assymmetric optic diffuser, light beam angle:25° black finishing colour. Light color temperature: 4000K, max. system power: 50W Max. fixture lumen output: 7600lm, efficacy: 152lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx38.4mmx37mm

Technical Assets

Dimensions (mm)

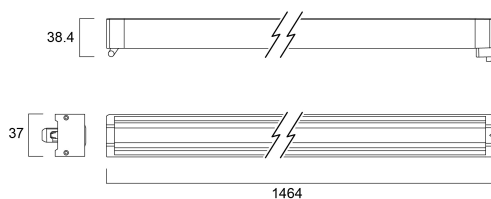

Photometrics

Distance [m]	Core diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.80 1.45	1.00 1.70	4000 2000
1.0	1.59 2.90	2.00 3.40	1000 500
1.5	2.39 4.35	3.00 5.10	400 200
2.0	3.18 5.80	4.00 6.80	200 100
2.5	3.98 7.25	5.00 8.50	100 50
3.0	4.77 8.70	6.00 10.00	50 25


Distance [m] Core diameter [m] Beam diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 110.0°)
— C90 - C270 (Half beam angle: 77.0°)

Pixo Line 1500mm Double Assymmetric 840 Negro

Item No: 0007834

SYLVANIA



Informacion General

Nombre del producto	Pixo Line 1500mm Double Assymmetric 840 Negro
Tecnología	LED
Casquillo	N/A
Montaje	Montaje en carril
Aplicación	Comercio, Hostelería, Museos y galerías, Oficina
Rango de temperatura operativa	-20°C...+40°C
ETIM	EC000996
Garantía	5 años

Datos ópticos

Lúmenes	7600
Eficacia (lmW)	152
Temperatura de color (K)	4000
Color de la luz	Blanco neutro
CRI (Ra)	80
Consistencia del color (SDCM)	SDCM3
Ángulo del haz (°)	25
Ángulo del haz asimétrico	Double assymmetric 25
Control de deslumbramiento	< 25
Grupo de riesgo fotobiológico	No aplica

Datos eléctricos

Consumo total de energía (W)	50
Tensión de alimentación mín.	220,0
Tensión de alimentación máx.	240,0
Protección eléctrica	Clase III
Regulable	No
Modo de regulación	No aplicable
Clase de eficiencia energética (A>G) de la fuente de luz	D
Frecuencia nominal (Hz)	N/A

Información de vida útil

Vida útil media - L70 B50	90000
Vida media - L70/B20	90000
Vida media - L70/B10	90000
Vida media - L80/B50	90000
Vida media - L80/B20	79000
Vida media - L80/B10	76000
Vida media - L90/B50	43000
Vida media - L90/B20	37000
Vida media - L90/B10	36000

Pixo Line 1500mm Double Assymmetric 840 Negro

Item No: 0007834

SYLVANIA

Datos físicos

Acabado de color	Negro
Protección IP	IP20
Protección IK	IK03
Largo (mm)	1464
Ancho (mm)	37
Alto (mm)	38.4
Peso (kg)	0.9

Empaquetado

Código EAN	5410288078342
Largo del embalaje individual (cm)	147.0
Ancho del embalaje individual (cm)	4.3
Alto del embalaje individual (cm)	4.3
DUN14 (inner)	15410288078349
Cantidad de unidades por caja	10
Largo / alto del embalaje outer (cm)	149.0
Ancho del embalaje outer (cm)	24.0
Profundidad del embalaje outer (cm)	11.0

Información de seguridad

Prueba del hilo incandescente (°C)	650
Condiciones óptimas de funcionamiento (°C)	-20-40