


**PRO**<sup>TM</sup>

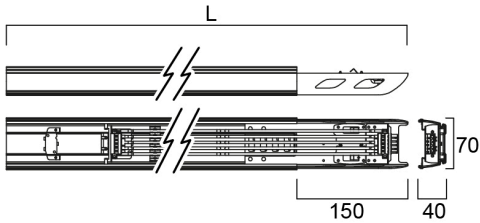

L 600 900 1202 1500 2403 3000 3605 4500

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	1.83 0.72	Ø171 Ø140 Ø100	563' 459' 328'	1520' 180' 697'
1.0	3.07 1.45	Ø171 Ø140 Ø100	563' 459' 328'	402' 132' 1414'
1.5	4.60 2.17	Ø171 Ø140 Ø100	563' 459' 328'	191' 147' 629'
2.0	6.14 2.90	Ø171 Ø140 Ø100	563' 459' 328'	1013' 80' 354'
2.5	7.67 3.62	Ø171 Ø140 Ø100	563' 459' 328'	668' 53' 225'
3.0	9.20 4.34	Ø171 Ø140 Ø100	563' 459' 328'	493' 37' 157'

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 — C0 - C180 (Half beam angle: 71.8°)  
 — C90 - C270 (Half beam angle: 113.8°)

