

# EMERGENCY PACK MANUAL TESTING 50V-200V

Item No: 0046602

**SYLVANIA**


**PRO**<sup>TM</sup>



The emergency kit enables conversion of general lighting for emergency operation. It is used for driving luminaires with forward voltages ( $V_f$ ) of 50V to 200V, and built-in adaptability that allows for optimum output current based on the forward voltage of the specific light engine for a more precise match to the controlled LED scheme. Features: Suitable for independent mounting, Auto load detecting, Compatible with leading brands of mains drivers, SmartCharge technology for NiMH batteries, Test-switch function, Battery deep-discharge protection, Compatible with NiMH batteries, 3-hour rated emergency duration, Supply current (max) 25mA. Ambient temperature ( $t_a$ ): 0°C to +35°C. Max case temperature ( $t_c$ ) +70°C. Conductor size : 0.2 to 1.5mm<sup>2</sup>. NiMH battery. Product contains a charging regime that prolongs battery life and reduces parasitic power consumption during the product life cycle. By controlling battery temperature this results in energy saving and reduction in maintenance costs throughout the premises.

## Technical Assets

### Dimensions (mm)

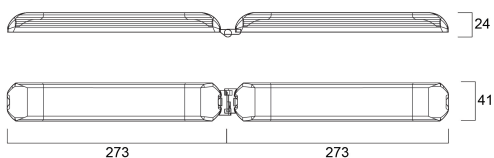

### Photometrics

# EMERGENCY PACK MANUAL TESTING 50V-200V

Item No: 0046602



## Informacion General

Nombre del producto	EMERGENCY PACK MANUAL TESTING 50V- 200V
Tecnología	Módulo de emergencia
Environment	Interior
Aplicación	Educación, Hostelería, Oficina, Comercio
ETIM	EC000471
Garantía	3 años

## Datos físicos

Peso (kg) | 0.47

## Empaquetado

Código EAN	5410288466026
Largo del embalaje individual (cm)	28.5
Ancho del embalaje individual (cm)	10.0
Alto del embalaje individual (cm)	4.5
DUN14 (inner)	05410288466026
Cantidad de la unidad de Venta	1
Cantidad de unidades por caja	25
Largo / alto del embalaje outer (cm)	46.0
Ancho del embalaje outer (cm)	31.0
Profundidad del embalaje outer (cm)	30.0

## Información de seguridad

Solo para uso en aplicaciones secas | Si