



Concord

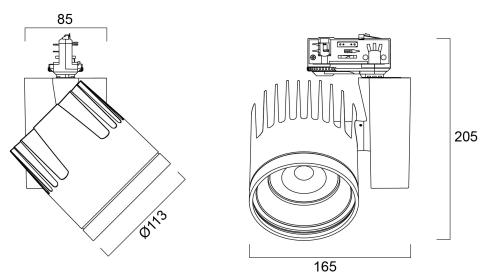

0.5	0.43	S/D E/C/D	1492 5483
1.0	0.87	S/D E/C/D	3632 1386
1.5	1.30	S/D E/C/D	1983 807
2.0	1.73	S/D E/C/D	980 381
2.5	2.16	S/D E/C/D	583 219
3.0	2.60	S/D E/C/D	391 152

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (half beam angle: 46.5°)





Concord

