

Pixo Line 1500 50W 7500lm 4000K UGR19 ALU 70° valkoinen

Tuotenro: 0007824

SYLVANIA


PROTM



Pixo Line is a linear track system, adds flexibility to any space due the variety of product optionsOffers an easy installation with two separate modulesPush-in/push-out mechanism with GR6d-15 connectorCompatible with Zhaga Book 14Aluminium body, plastic end caps,aluminised plastic low glare optics in a single line configuration, light beam angle:70°Textured white finishing colour.Light color temperature: 4000K, neutral white, max. system power: 50WMax. fixture lumen output: 7500lm, efficacy: 150lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiationMultipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA)Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrackElectrical protection: Class III. Degree of protection: IP20, suitable for indoor environment onlyLight modules should be combined with suitable in-track driversNominal product dimensions: L.1464mmx37.4mmx37mm

Tekniset ominaisuudet

Mitat (mm)

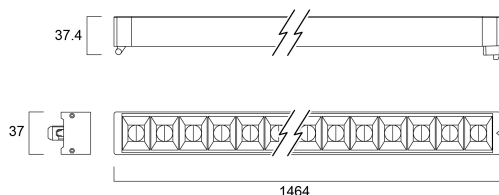

Valonjakotiedostot

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.65 0.70	50° 55°	2474 2614	2474 2614	698 698
1.0	1.30 1.40	50° 55°	4948 5228	4948 5228	174 174
1.5	1.96 2.09	50° 55°	7422 7842	7422 7842	74 74
2.0	2.61 2.79	50° 55°	9896 10412	9896 10412	28 28
2.5	3.26 3.49	50° 55°	12370 13015	12370 13015	9 9
3.0	3.91 4.19	50° 55°	14844 15689	14844 15689	4 4

Distance [m] Cone diameter [m]
— C0 - C180 (Half beam angle: 60.8°)
— C90 - C270 (Half beam angle: 66.2°)

Pixo Line 1500 50W 7500lm 4000K UGR19 ALU 70° valkoinen

Tuotenro: 0007824

SYLVANIA

Rakennetiedot

Rungon väri	Valkoinen
IP-luokka	IP20
IK-luokka	IK03
Pituus (mm)	1464
Leveys (mm)	37
Korkeus (mm)	37.4
Paino (kg)	0.9

Pakkaustiedot

EAN-koodi	5410288078243
Yksittäispakkauksen pituus / korkeus (cm)	147.0
Yksittäispakkauksen leveys (cm)	4.3
Yksittäispakkauksen syvyys (cm)	4.3
DUN14 (tukkupakkaus 1)	15410288078240
Kappalemäärä tukkupakkaus 2	10
Tukkupakkaus 2 pituus / korkeus (cm)	149.0
Tukkupakkaus 2 leveys (cm)	24.0
Tukkupakkaus 2 syvyys (cm)	11.0

Turvallisuustiedot

Hehkulankatesti (°C)	650
Käyttölämpötila	-20-40