

Pixo Line 1500 50W 7300lm 3000K UGR19 ALU 70° musta

Tuotenro: 0007827

SYLVANIA


PROTM



Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps,aluminised plastic low glare optics in a single line configuration, light beam angle:70° Textured black finishing colour. Light color temperature: 3000K, warm white, max. system power: 50W Max. fixture lumen output: 7300lm, efficacy: 146lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx37.4mmx37mm

Tekniset ominaisuudet

Mitat (mm)

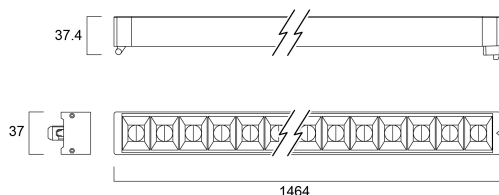

Valonjakotiedostot

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.66 0.69	60° 63°	1380 1300
1.0	1.33 1.37	60° 63°	339 325
1.5	1.99 2.06	60° 63°	189 180
2.0	2.66 2.75	60° 63°	111 105
2.5	3.32 3.44	60° 63°	70 66
3.0	3.99 4.12	60° 63°	47 44

Pixo Line 1500 50W 7300lm 3000K UGR19 ALU 70° musta

Tuotenro: 0007827

SYLVANIA

Rakennetiedot

Rungon väri	Musta
IP-luokka	IP20
IK-luokka	IK03
Pituus (mm)	1464
Leveys (mm)	37
Korkeus (mm)	37.4
Paino (kg)	0.9

Pakkaustiedot

EAN-koodi	5410288078274
Yksittäispakkauksen pituus / korkeus (cm)	147.0
Yksittäispakkauksen leveys (cm)	4.3
Yksittäispakkauksen syvyys (cm)	4.3
DUN14 (tukkupakkaus 1)	15410288078271
Kappalemäärä tukkupakkaus 2	10
Tukkupakkaus 2 pituus / korkeus (cm)	149.0
Tukkupakkaus 2 leveys (cm)	24.0
Tukkupakkaus 2 syvyys (cm)	11.0

Turvallisuustiedot

Hehkulankatesti (°C)	650
Käyttölämpötila	-20-40