


# OPTICLIP LIGHT E 830 2DC WH

Tuotenro: 0044038

**SYLVANIA**

**PRO**<sup>TM</sup>

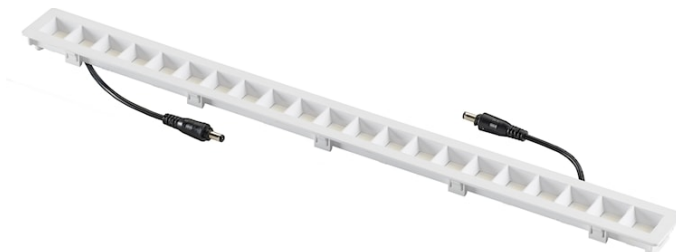

OPTICLIP LIGHT E 830 2DC WH LED light module with reflector, assembled with 2DC connectors, 200-450mA drive current, up to 1900lm flux @450mA drive current, CRI80, 3000K, SDCM≤3

## Tekniset ominaisuudet

### Valonjakotiedostot

|     |              |                                     |                    |
|-----|--------------|-------------------------------------|--------------------|
| 0.5 | 0.99<br>0.99 | 50°<br>E(C80) 44.7°<br>E(C90) 43.8° | 2038<br>477<br>501 |
| 1.0 | 1.98<br>1.98 | 50°<br>E(C80) 44.7°<br>E(C90) 43.8° | 699<br>119<br>125  |
| 1.5 | 2.97<br>2.96 | 50°<br>E(C80) 44.7°<br>E(C90) 43.8° | 230<br>80<br>85    |
| 2.0 | 3.96<br>3.91 | 50°<br>E(C80) 44.7°<br>E(C90) 43.8° | 185<br>50<br>51    |
| 2.5 | 4.95<br>4.76 | 50°<br>E(C80) 44.7°<br>E(C90) 43.8° | 105<br>29<br>30    |
| 3.0 | 5.94<br>5.71 | 50°<br>E(C80) 44.7°<br>E(C90) 43.8° | 73<br>19<br>14     |

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (half beam angle: 97.2°)  
— C90 - C270 (half beam angle: 99.4°)

