
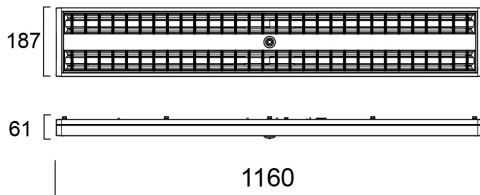


PRO

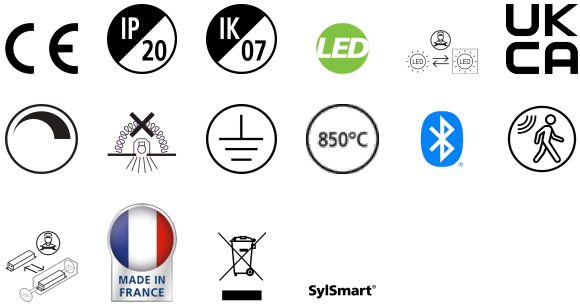

Distance [m]	Cone diameter [m]	E17	E170	E170	E170
0.5	0.90	419'	1570	419'	305
	0.68	34.4"	329	34.4"	329
1.0	1.79	419'	485	419'	363
	1.37	34.4"	1302	34.4"	1302
1.5	2.69	419'	202	419'	64
	2.05	34.4"	879	34.4"	879
2.0	3.59	419'	154	419'	28
	2.74	34.4"	126	34.4"	126
2.5	4.49	419'	70	419'	13
	3.42	34.4"	228	34.4"	228
3.0	5.38	419'	51	419'	10
	4.11	34.4"	158	34.4"	158

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 66.8°)
— C90 - C270 (Half beam angle: 83.8°)

