


SYLVANIA

PRO

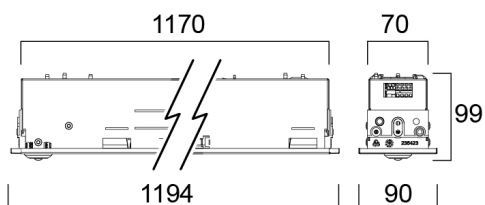

0.5	0.90 0.62	50° 50° 50°	1170 1470 2200
1.0	1.80 1.24	50° 50° 50°	1790 2200 850
1.5	2.70 1.86	50° 50° 50°	790 154 245
2.0	3.60 2.48	50° 50° 50°	448 82 135
2.5	4.50 3.10	50° 50° 50°	237 59 88
3.0	5.40 3.72	50° 50° 50°	139 41 61

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 63.6°)
— C90 - C270 (Half beam angle: 64.0°)

