


Pixo Zoom 2200lm 17D-60D 3CCT On-Board Dim White

Code article 0004524

SYLVANIA


PROTM

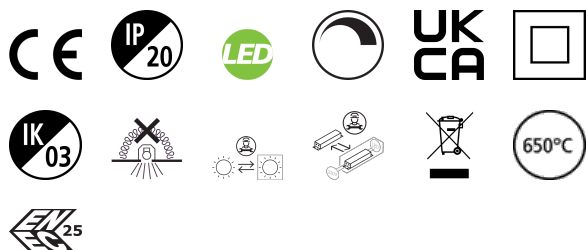

Pixo Zoom with on-board dimming knob, and 3-CCT switch Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lens Adjustable beam angle between 17° - 60° Die-cast aluminium body, Textured white finishing colour Light color temperature: 3CCT - 2700-3000-4000K, CCT switch on the adaptor System power: 24W, Fixture lumen output: 2200lm, efficacy: 92lm/W. LED chromacity: 3 step MacAdam ellipse LED source measured at 2700K & 4000K (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, Dimmable via on-board dimming knob on track adaptor, dimming level between 1-100%, ultra low LED flickering rate (5% or less), Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack. Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.85mmx170mm 5 years warranty. Not compatible with surface mount monopoint accessory. Length of the adaptor: 178mm.

Atouts techniques

Dimensions (mm)

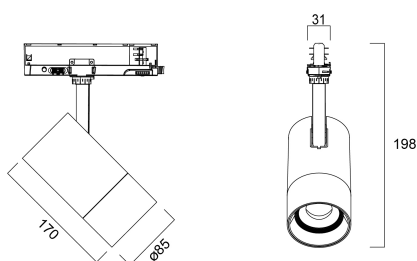

Photométrie


Distance [m]	Beam diameter [m]	Beam diameter [ft]	Beam diameter [in]	Illuminance [lx]
0.5	0.15 0.14	5.0" 4.9"	12.7 12.5	48713 39999
1.0	0.30 0.27	10.0" 8.9"	25.4 22.6	12178 9999
1.5	0.44 0.41	14.0" 12.9"	35.4 32.8	5413 2999
2.0	0.59 0.55	18.0" 16.9"	45.4 42.8	3045 1499
2.5	0.74 0.68	22.0" 20.9"	55.4 52.8	1949 999
3.0	0.89 0.82	26.0" 24.9"	65.4 62.8	1333 899

Distance [m] Beam diameter [m]
— CD - C180 (Half beam angle: 15.0°)
— CS0 - C270 (Half beam angle: 15.0°)

Pixo Zoom 2200lm 17D-60D 3CCT On-Board Dim White

Code article 0004524

SYLVANIA



Données générales

Nom du produit	Pixo Zoom 2200lm 17D-60D 3CCT On-Board Dim White
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Track mounting
Built in presence detector	NONE
General application	Hospitality, Museums & Galleries, Office, Retail
Operating temperature range (°C)	1°C...+35°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Numéro virtuel FI	4289281
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	2200
Luminaire efficacy (lm/W)	92
Couleur de lumière	Warm White or Neutral White or Daylight
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Photobiological Risk Group	RG1

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	24
Actuel (A)	0.11
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	Onboard pot
Minimum dimming level (%)	1
Courant d'appel (A)	18
Inrush Duration (µs)	3
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	53
Max. products per 13A C Breaker	69
Max. products per 16A C Breaker	85
Max. products per 20A C Breaker	107
Max. products per 10A B Breaker	33
Max. products per 13A B Breaker	43
Max. products per 16A B Breaker	53
Max. products per 20A B Breaker	67

Pixo Zoom 2200lm 17D-60D 3CCT On-Board Dim White

Code article 0004524



Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	100000
Lifespan L80 B20	93000
Lifespan L80 B10	86000
Lifespan L90 B50	56000
Lifespan L90 B20	44000
Lifespan L90 B10	41000

Données physiques

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Finition réflecteur	High-gloss
Longueur (mm)	170
Nominal Product Diameter (mm)	85
Poids (kg)	0.97

Emballage

Product EAN number	5410288045245
Longueur simple de l'emballage (cm)	24.0
Largeur simple de l'emballage (cm)	12.0
Packaging single depth (cm)	23.3
DUN14 (inner)	15410288045242
Units per outer package	8
Packaging outer length / height (cm)	50.0
Packaging outer width (cm)	49.5
Packaging outer depth (cm)	25.5

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	1-35