


# Pixo Small 1650lm 940 NB MB WB White

Code article 0004546

**SYLVANIA**


**PRO**<sup>TM</sup>

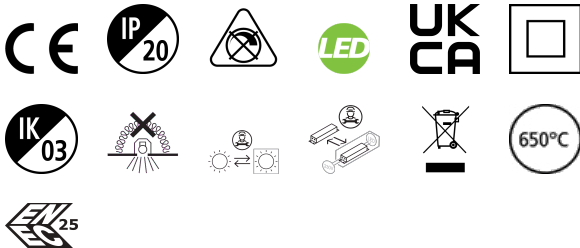

Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured white finishing colour Light color temperature: 4000K, natural white System power: 14W, Fixture lumen output: 1650lm, efficacy: 118lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.60mmx150mm, length of the Adaptor : 127mm. 5 years warranty. Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal. Not compatible with surface mount monopoint accessory

## Atouts techniques

### Dimensions (mm)

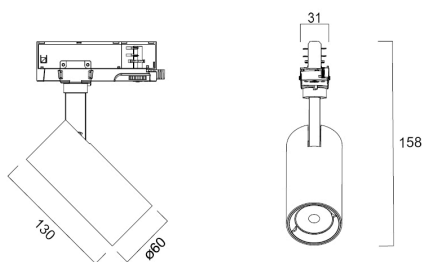

### Photométrie


Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.32 0.21	0.10° 0.10°	2088 6636
1.0	0.45 0.46	0.10° 0.10°	872 2489
1.5	0.67 0.69	0.10° 0.10°	384 1090
2.0	0.89 0.92	0.10° 0.10°	176 519
2.5	1.12 1.15	0.10° 0.10°	84 250
3.0	1.34 1.39	0.10° 0.10°	48 143

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 — C2 - C180 (Half beam angle: 26.0°)  
 — C50 - C270 (Half beam angle: 25.2°)

# Pixo Small 1650lm 940 NB MB WB White

Code article 0004546

**SYLVANIA**



## Données générales

Nom du produit	Pixo Small 1650lm 940 NB MB WB White
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Track mounting
Built in presence detector	NONE
General application	Museums & Galleries, Retail, Office, Residential & Consumer
Operating temperature range (°C)	1°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Numéro virtuel FI	4279597
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	1650
Luminaire efficacy (lm/W)	118
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Photobiological Risk Group	RG1

## Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	14
Actuel (A)	0.06
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Courant d'appel (A)	20
Inrush Duration (µs)	40
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	48
Max. products per 13A C Breaker	62
Max. products per 16A C Breaker	77
Max. products per 20A C Breaker	96
Max. products per 10A B Breaker	30
Max. products per 13A B Breaker	39
Max. products per 16A B Breaker	48
Max. products per 20A B Breaker	60

# Pixo Small 1650lm 940 NB MB WB White

Code article 0004546

**SYLVANIA**

## Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	100000
Lifespan L80 B20	100000
Lifespan L80 B10	100000
Lifespan L90 B50	100000
Lifespan L90 B20	100000
Lifespan L90 B10	100000

## Données physiques

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Finition réflecteur	High-gloss
Longueur (mm)	150
Nominal Product Diameter (mm)	60
Poids (kg)	0.385

## Emballage

Product EAN number	5410288045467
Longueur simple de l'emballage (cm)	19.0
Largeur simple de l'emballage (cm)	9.5
Packaging single depth (cm)	19.3
DUN14 (inner)	15410288045464
Units per outer package	16
Packaging outer length / height (cm)	40.5
Packaging outer width (cm)	40.0
Packaging outer depth (cm)	41.0

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	1-25