


Pixo Surface 3200lm 3CCT MB WB DALI White

Code article 0004723

SYLVANIA

PROTM

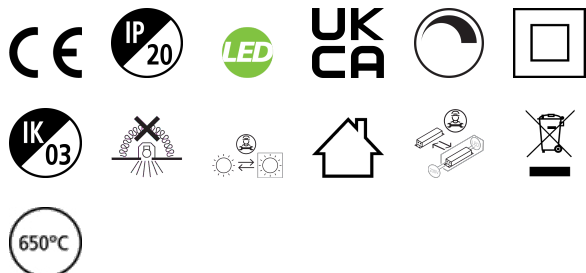

Simple and slick integral design. Extremely precise light beams due to the high-quality lenses. Easily replaceable lens system, die-cast aluminium body, beam angle: 36°, and 54° beam angle included in the packaging, Textured white finishing colour. Light color temperature: 2700-3000-4000K, 3-CCT switch on the housing of the product, System power: 29W, Fixture lumen output: 3200lm, efficacy: 110lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation, Operating voltage 220-240V / 50-60Hz, DALI-2 dimmable driver, ultra low LED flickering rate (5% or less). Suitable for ceiling surface mounting, wall surface mounting. Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only. Push-in terminals for quick installation. Lifespan up to 100,000h, L90B10. Horizontal rotation: 345°, vertical tilt: 90°, Nominal product dimensions: D.81mmx250mm. 5 years warranty. Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal.


Pixo Surface 3200lm 3CCT MB WB DALI White

Code article 0004723



SYLVANIA

Atouts techniques

Dimensions (mm)

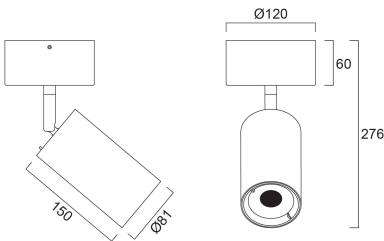

Photométrie



Données générales

Nom du produit	Pixo Surface 3200lm 3CCT MB WB DALI White
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling surface mounting, Wall surface mounted
Built in presence detector	NONE
General application	Museums & Galleries, Retail
Operating temperature range (°C)	1°C...+35°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4279907
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	110
Couleur de lumière	N/A
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Photobiological Risk Group	RG1

Pixo Surface 3200lm 3CCT MB WB DALI White

Code article 0004723

SYLVANIA

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	29
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Minimum dimming level (%)	1
Courant d'appel (A)	30
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	27
Max. products per 16A C Breaker	42
Max. products per 16A B Breaker	28
Connectable conductor cross section - Max (mm²)	2.5

Durée de vie

Lifespan L70 B50	120000
Lifespan L70 B20	120000
Lifespan L70 B10	120000
Lifespan L80 B50	120000
Lifespan L80 B20	120000
Lifespan L80 B10	120000
Lifespan L90 B50	120000
Lifespan L90 B20	109000
Lifespan L90 B10	100000

Données physiques

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Nominal Product Height (mm)	276
Nominal Product Diameter (mm)	81
Poids (kg)	1.05

Emballage

Product EAN number	5410288047232
Longueur simple de l'emballage (cm)	33.0
Largeur simple de l'emballage (cm)	17.0
Packaging single depth (cm)	16.0
DUN14 (inner)	15410288047239
Units per outer package	6
Packaging outer length / height (cm)	52.5
Packaging outer width (cm)	34.5
Packaging outer depth (cm)	34.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	1-35