


START Track Spot S DALI 1350lm 940 MB WHT

Code article 0004931


SYLVANIA

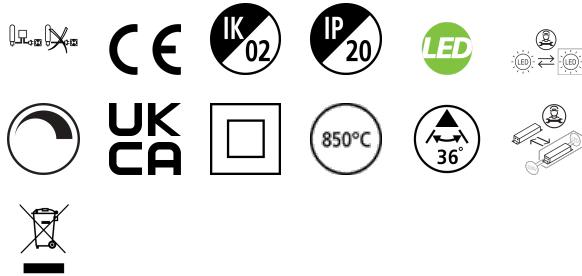

Spotlight for track mounting, decorative heat sink, white (RAL 9016) housing, equipped with Global GAC69 Pulse Adaptor, 1359 Lm, 14 W, 97 Lm/W, 4000 K, drive current: 350 mA, CRI 90, 36° beam angle, DALI dimmable, IP20, IK02, 50000 hrs, (H x W) 200 x 140 mm.

Atouts techniques


Dimensions (mm)

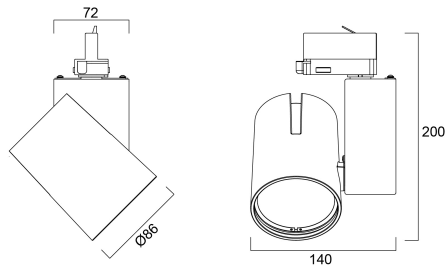

Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.33	Ø171 Ø100	10477 4817
1.0	0.66	Ø342 Ø100	2619 1159
1.5	0.99	Ø513 Ø100	1164 502
2.0	1.32	Ø684 Ø100	695 292
2.5	1.64	Ø855 Ø100	419 171
3.0	1.97	Ø1026 Ø100	294 123

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 36.4°)

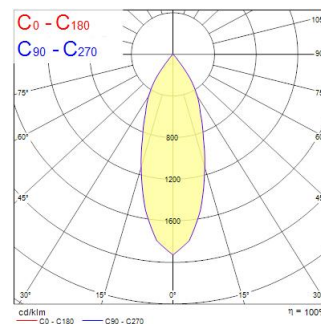

START Track Spot S DALI 1350lm 940 MB WHT

Code article 0004931

SYLVANIA

Données générales

Nom du produit	START Track Spot S DALI 1350lm 940 MB WHT
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Track mounting
Fixture rating	Enclosed
General application	Retail
Operating temperature range (°C)	1°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel FI	4274458
Numéro virtuel SE	7426221
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	1359
Luminaire efficacy (lm/W)	97
LOR (%)	100
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	36
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	14
Actuel (A)	0.06
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.96
Electrical protection	Class II
Control gear required	Yes
Type d'appareillage	Electronic ballast
Montage de l'appareillage	Integral
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	350
Courant d'appel (A)	20
Inrush Duration (µs)	140
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	40
Max. products per 13A C Breaker	56
Max. products per 16A C Breaker	64
Max. products per 20A C Breaker	80
Max. products per 10A B Breaker	21
Max. products per 13A B Breaker	28
Max. products per 16A B Breaker	35
Max. products per 20A B Breaker	44

START Track Spot S DALI 1350lm 940 MB WHT

Code article 0004931

SYLVANIA

Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	100000
Lifespan L80 B20	100000
Lifespan L80 B10	79500
Lifespan L90 B50	69500
Lifespan L90 B20	54500
Lifespan L90 B10	47500

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Finition réflecteur	High-gloss
Largeur (mm)	140
Nominal Product Height (mm)	200
Poids (kg)	0.94

Emballage

Product EAN number	5410288049311
Longueur simple de l'emballage (cm)	17.5
Largeur simple de l'emballage (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (inner)	05410288049311
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	1-25
Utilisation pour applications sèches uniquement	Yes