


START Spot 610lm 3CCT IP65 WH

Code article 0005565

SYLVANIA


START

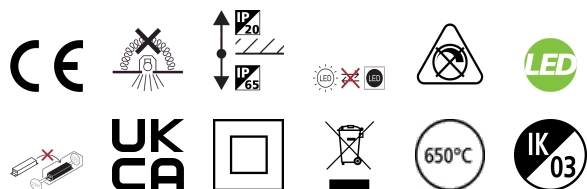

Integrated LED recessed spotlight, fixed, non dimmable, 3 CCT 2700K-3000K-4000K, 100° degree beam angle, polycarbonate white body, low profile 47mm recessed depth, IP65 from the front, IK03, loop-in/loop-out terminals for fast wiring, 87mm bezel diameter, 68-74mm cutout, frosted lens. Additional silver or black bezel can be ordered as accessory.


Atouts techniques

Dimensions (mm)

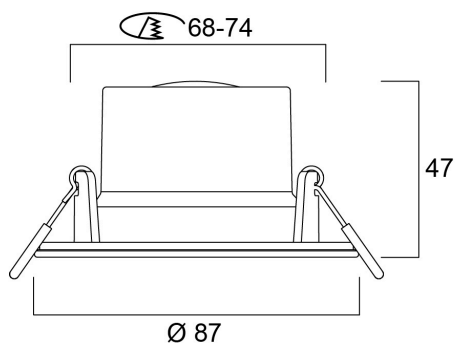

Photométrie

Distance (m)	Cone diameter (m)	Beam angle (°)	Illuminance (lx)
0.5	1.35 1.37	50° 54.1° 59.9°	395 368 330
1.0	2.70 2.74	50° 54.1° 59.9°	99 92 83
1.5	4.05 4.11	50° 54.1° 59.9°	42 39 35
2.0	5.40 5.49	50° 54.1° 59.9°	25 23 21
2.5	6.75 6.86	50° 54.1° 59.9°	16 15 14
3.0	8.10 8.23	50° 54.1° 59.9°	11 10 9



START Spot 610lm 3CCT IP65 WH

Code article 0005565

SYLVANIA

Données générales

Nom du produit	START Spot 610lm 3CCT IP65 WH
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Hospitality, Residential & Consumer, Retail
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	3 ans

Données optiques

Fixture luminous flux (lm)	610
Luminaire efficacy (lm/W)	104
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	100
Distribution type	Symmetric
Photobiological Risk Group	RG0

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	6
Actuel (A)	0.026
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.65
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	100
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	20
Courant d'appel (A)	2
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	256
Max. products per 13A C Breaker	332
Max. products per 16A C Breaker	418
Max. products per 20A C Breaker	511
Max. products per 10A B Breaker	155
Max. products per 16A B Breaker	246
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1.5

Durée de vie

Lifespan L70 B50	68000
Lifespan L80 B20	39000
Lifespan L80 B10	36000

START Spot 610lm 3CCT IP65 WH

Code article 0005565



Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP65/20
IK rating	IK03
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Nominal Product Height (mm)	47
Nominal Product Diameter (mm)	87
Poids (kg)	0.07

Emballage

Product EAN number	5410288055657
Longueur simple de l'emballage (cm)	9.0
Largeur simple de l'emballage (cm)	6.0
Packaging single depth (cm)	9.0
DUN14 (inner)	15410288055654
Units per inner package	6
Packaging inner length / height (cm)	28.5
Packaging inner width (cm)	7.5
Packaging inner depth (cm)	19.0
DUN14 (outer)	25410288055651
Units per outer package	48
Packaging outer length / height (cm)	32.0
Packaging outer width (cm)	30.0
Packaging outer depth (cm)	40.5

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-40