


Pixo Line 900 UGR19 940 Black

Code article 0006826

SYLVANIA


PROTM

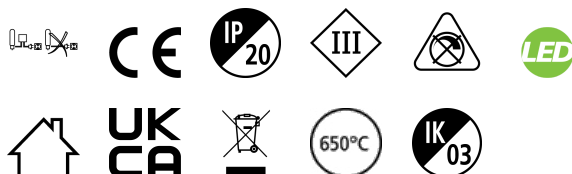

Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps, aluminised plastic low glare optics in a single line configuration, light beam angle: 80° Textured black finishing colour. Light color temperature: 4000K, neutral white, max. system power: 29W. Max. fixture lumen output: 3950lm, efficacy: 136lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module, 4 power settings suitable with Pixo Line 900 to meet all installation needs with one single product, selection and setting on driver - between 17W (290mA), 19W (400mA), 24W (500mA), 29W (600mA). Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.864mmx37.4mmx37mm

Atouts techniques

Dimensions (mm)

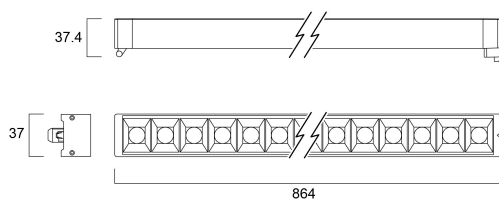

Photométrie

0.5	0.67 0.65	E171 E180 E100	3285 2860 2482
1.0	1.34 1.30	E171 E180 E100	2071 1866 1613
1.5	2.02 1.96	E171 E180 E100	921 824 722
2.0	2.69 2.61	E171 E180 E100	518 468 403
2.5	3.36 3.26	E171 E180 E100	331 300 260
3.0	4.03 3.91	E171 E180 E100	220 200 176

Distance [m] Cone diameter [m] Illuminance [lx]


— C0 - C180 (Half beam angle: 66.2°)

— C90 - C270 (Half beam angle: 67.8°)

Pixo Line 900 UGR19 940 Black

Code article 0006826

SYLVANIA



Données générales

Nom du produit	Pixo Line 900 UGR19 940 Black
Technologie	LED
Montage	Track mounting
General application	Hospitality, Museums & Galleries, Office, Retail
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC000996
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3950
Luminaire efficacy (lm/W)	136
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	80
Photobiological Risk Group	Not applicable

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	29
Electrical protection	Class III
Control gear required	Yes
Dimmable	No
Dimming method	N/A
Min. drive current (mA)	350
Max. drive current (mA)	600
Drive current - Range (mA)	350mA / 600mA
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz

Données physiques

Housing colour	Black
IP rating	IP20
IK rating	IK03
Longueur (mm)	864
Largeur (mm)	37
Nominal Product Height (mm)	37.4
Poids (kg)	0.5

Pixo Line 900 UGR19 940 Black

Code article 0006826

SYLVANIA

Emballage

Product EAN number	5410288068268
Longueur simple de l'emballage (cm)	87.0
Largeur simple de l'emballage (cm)	4.3
Packaging single depth (cm)	4.3
DUN14 (inner)	15410288068265
Units per outer package	20
Packaging outer length / height (cm)	88.8
Packaging outer width (cm)	23.5
Packaging outer depth (cm)	19.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40