

Pixo Line 1500 90D Beam 840 White

Code article 0007820

SYLVANIA


PROTM



Pixo Line is a linear track system, adds flexibility to any space due the variety of product optionsOffers an easy installation with two separate modulesPush-in/push-out mechanism with GR6d-15 connectorCompatible with Zhaga Book 14Aluminium body, plastic end caps, translucent optic diffuser, light beam angle: 90°Textured white finishing colour.Light color temperature: 4000K, neutral white, max. system power: 50WMax. fixture lumen output: 7400lm, efficacy: 148lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiationMultipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA)Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrackElectrical protection: Class III. Degree of protection: IP20, suitable for indoor environment onlyLight modules should be combined with suitable in-track driversNominal product dimensions: L.1464mmx38.4mmx37mm

Atouts techniques

Dimensions (mm)

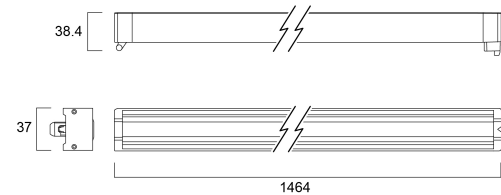

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [in]	Illuminance [lx]
0.5	1.04	1.40	5.0"	12.7"	6199
1.0	2.07	2.79	5.0"	12.7"	1540
1.5	3.11	4.19	5.0"	12.7"	694
2.0	4.14	5.59	5.0"	12.7"	380
2.5	5.18	6.98	5.0"	12.7"	246
3.0	6.21	8.38	5.0"	12.7"	171

Distance [m] Cone diameter [m] Beam angle [°] Beam diameter [m] Beam diameter [in] Illuminance [lx]

— C0 - C180 (Half beam angle: 105.0°)

— C90 - C270 (Half beam angle: 92.0°)

Pixo Line 1500 90D Beam 840 White

Code article 0007820



Données physiques

Housing colour	White
IP rating	IP20
IK rating	IK03
Longueur (mm)	1464
Largeur (mm)	37
Nominal Product Height (mm)	38.4
Poids (kg)	0.9

Emballage

Product EAN number	5410288078205
Longueur simple de l'emballage (cm)	147.0
Largeur simple de l'emballage (cm)	4.3
Packaging single depth (cm)	4.3
DUN14 (inner)	15410288078202
Units per outer package	10
Packaging outer length / height (cm)	149.0
Packaging outer width (cm)	24.0
Packaging outer depth (cm)	11.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40