

Pixo Line 1500 UGR19 830 Black

Code article 0007827

SYLVANIA


PROTM



Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps,aluminised plastic low glare optics in a single line configuration, light beam angle:70° Textured black finishing colour. Light color temperature: 3000K, warm white, max. system power: 50W Max. fixture lumen output: 7300lm, efficacy: 146lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx37.4mmx37mm

Atouts techniques

Dimensions (mm)

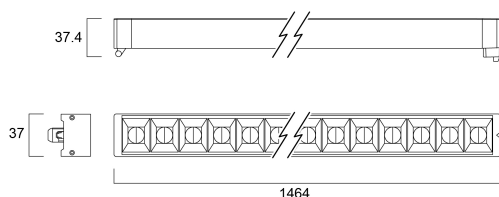


Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [in]	Beam diameter [ft]
0.5	0.66	70°	0.66	2.52	0.86
1.0	1.33	70°	1.33	5.04	1.71
1.5	1.99	70°	1.99	7.56	2.51
2.0	2.66	70°	2.66	10.08	3.31
2.5	3.32	70°	3.32	12.60	4.13
3.0	3.99	70°	3.99	15.12	4.94
3.5	4.65	70°	4.65	17.64	5.75
4.0	5.32	70°	5.32	20.16	6.56
4.5	5.98	70°	5.98	22.68	7.37
5.0	6.65	70°	6.65	25.20	8.18
5.5	7.31	70°	7.31	27.72	8.99
6.0	7.98	70°	7.98	30.24	9.80
6.5	8.64	70°	8.64	32.76	10.61
7.0	9.31	70°	9.31	35.28	11.42
7.5	9.97	70°	9.97	37.80	12.23
8.0	10.64	70°	10.64	40.32	13.04
8.5	11.30	70°	11.30	42.84	13.85
9.0	11.97	70°	11.97	45.36	14.66
9.5	12.63	70°	12.63	47.88	15.47
10.0	13.30	70°	13.30	50.40	16.28
10.5	13.96	70°	13.96	52.92	17.09
11.0	14.63	70°	14.63	55.44	17.90
11.5	15.29	70°	15.29	57.96	18.71
12.0	15.96	70°	15.96	60.48	19.52
12.5	16.62	70°	16.62	63.00	20.33
13.0	17.29	70°	17.29	65.52	21.14
13.5	17.95	70°	17.95	68.04	21.95
14.0	18.62	70°	18.62	70.56	22.76
14.5	19.28	70°	19.28	73.08	23.57
15.0	19.95	70°	19.95	75.60	24.38
15.5	20.61	70°	20.61	78.12	25.19
16.0	21.28	70°	21.28	80.64	26.00
16.5	21.94	70°	21.94	83.16	26.81
17.0	22.61	70°	22.61	85.68	27.62
17.5	23.27	70°	23.27	88.20	28.43
18.0	23.94	70°	23.94	90.72	29.24
18.5	24.60	70°	24.60	93.24	30.05
19.0	25.27	70°	25.27	95.76	30.86
19.5	25.93	70°	25.93	98.28	31.67
20.0	26.60	70°	26.60	100.80	32.48
20.5	27.26	70°	27.26	103.32	33.29
21.0	27.93	70°	27.93	105.84	34.10
21.5	28.59	70°	28.59	108.36	34.91
22.0	29.26	70°	29.26	110.88	35.72
22.5	29.92	70°	29.92	113.40	36.53
23.0	30.59	70°	30.59	115.92	37.34
23.5	31.25	70°	31.25	118.44	38.15
24.0	31.92	70°	31.92	120.96	38.96
24.5	32.58	70°	32.58	123.48	39.77
25.0	33.25	70°	33.25	126.00	40.58
25.5	33.91	70°	33.91	128.52	41.39
26.0	34.58	70°	34.58	131.04	42.20
26.5	35.24	70°	35.24	133.56	43.01
27.0	35.91	70°	35.91	136.08	43.82
27.5	36.57	70°	36.57	138.60	44.63
28.0	37.24	70°	37.24	141.12	45.44
28.5	37.90	70°	37.90	143.64	46.25
29.0	38.57	70°	38.57	146.16	47.06
29.5	39.23	70°	39.23	148.68	47.87
30.0	39.90	70°	39.90	151.20	48.68
30.5	40.56	70°	40.56	153.72	49.49
31.0	41.23	70°	41.23	156.24	50.30
31.5	41.89	70°	41.89	158.76	51.11
32.0	42.56	70°	42.56	161.28	51.92
32.5	43.22	70°	43.22	163.80	52.73
33.0	43.89	70°	43.89	166.32	53.54
33.5	44.55	70°	44.55	168.84	54.35
34.0	45.22	70°	45.22	171.36	55.16
34.5	45.88	70°	45.88	173.88	55.97
35.0	46.55	70°	46.55	176.40	56.78
35.5	47.21	70°	47.21	178.92	57.59
36.0	47.88	70°	47.88	181.44	58.40
36.5	48.54	70°	48.54	183.96	59.21
37.0	49.21	70°	49.21	186.48	60.02
37.5	49.87	70°	49.87	189.00	60.83
38.0	50.54	70°	50.54	191.52	61.64
38.5	51.20	70°	51.20	194.04	62.45
39.0	51.87	70°	51.87	196.56	63.26
39.5	52.53	70°	52.53	199.08	64.07
40.0	53.20	70°	53.20	201.60	64.88
40.5	53.86	70°	53.86	204.12	65.69
41.0	54.53	70°	54.53	206.64	66.50
41.5	55.19	70°	55.19	209.16	67.31
42.0	55.86	70°	55.86	211.68	68.12
42.5	56.52	70°	56.52	214.20	68.93
43.0	57.19	70°	57.19	216.72	69.74
43.5	57.85	70°	57.85	219.24	70.55
44.0	58.52	70°	58.52	221.76	71.36
44.5	59.18	70°	59.18	224.28	72.17
45.0	59.85	70°	59.85	226.80	72.98
45.5	60.51	70°	60.51	229.32	73.79
46.0	61.18	70°	61.18	231.84	74.60
46.5	61.84	70°	61.84	234.36	75.41
47.0	62.51	70°	62.51	236.88	76.22
47.5	63.17	70°	63.17	239.40	77.03
48.0	63.84	70°	63.84	241.92	77.84
48.5	64.50	70°	64.50	244.44	78.65
49.0	65.17	70°	65.17	246.96	79.46
49.5	65.83	70°	65.83	249.48	80.27
50.0	66.50	70°	66.50	252.00	81.08
50.5	67.16	70°	67.16	254.52	81.89
51.0	67.83	70°	67.83	257.04	82.70
51.5	68.49	70°	68.49	259.56	83.51
52.0	69.16	70°	69.16	262.08	84.32
52.5	69.82	70°	69.82	264.60	85.13
53.0	70.49	70°	70.49	267.12	85.94
53.5	71.15	70°	71.15	269.64	86.75
54.0	71.82	70°	71.82	272.16	87.56
54.5	72.48	70°	72.48	274.68	88.37
55.0	73.15	70°	73.15	277.20	89.18
55.5	73.81	70°	73.81	279.72	89.99
56.0	74.48	70°	74.48	282.24	90.80
56.5	75.14	70°	75.14	284.76	91.61
57.0	75.81	70°	75.81	287.28	92.42
57.5	76.47	70°	76.47	289.80	93.23
58.0	77.14	70°	77.14	292.32	94.04
58.5	77.80	70°	77.80	294.84	94.85
59.0	78.47	70°	78.47	297.36	95.66
59.5	79.13	70°	79.13	299.88	96.47
60.0	79.80	70°	79.80	302.40	97.28
60.5	80.46	70°	80.46	304.92	98.09
61.0	81.13	70°	81.13	307.44	98.90
61.5	81.79	70°	81.79	309.96	99.71
62.0	82.46	70°	82.46	312.48	100.52
62.5	83.12	70°	83.12	315.00	101.33
63.0	83.79	70°	83.79	317.52	102.14
63.5	84.45	70°	84.45	320.04	102.95
64.0	85.12	70°	85.12	322.56	103.76
64.5	85.78	70°	85.78	325.08	104.57
65.0	86.45	70°	86.45	327.60	105.38
65.5	87.11	70°	87.11	330.12	106.19
66.0	87.78	70°	87.78	332.64	107.00
66.5	88.44	70°	88.44	335.16	107.81
67.0	89.11	70°	89.11	337.68	108.62
67.5	89.77	70°	89.77	340.20	109.43
68.0	90.44	70°	90.44	342.72	110.24
68.5	91.10	70°	91.10	345.24	111.05
69.0	91.77	70°	91.77	347.76	111.86
69.5	92.43	70°	92.43	350.28	112.67
70.0	93.10	70°	93.10	352.80	113.48
70.5	93.76	70°	93.76	355.32	114.29
71.0	94.43	70°	94.43	357.84	115.10
71.5	95.09	70°	95.09	360.36	115.91
72.0	95.76	70°	95.76	362.88	116.72
72.5	96.42	70°	96.42	365.40	117.53
73.0	97.09	70°	97.09	367.92	118.34
73.5	97.75	70°	97.75	370.44	119.15
74.0	98.42	70°	98.42	372.96	119.96
74.5	99.08	70°	99.08	375.48	120.77
75.0	99.75	70°	99.75	378.00	121.58
75.5	100.41	70°	100.41	380.52	122.39
76.0	101.08	70°	101.08	383.04	123.20
76.5	101.74	70°	101.74	385.56	124.01
77.0	102.41	70°	102.41	388.08	124.82
77.5	103.07	70°	103.07	390.60	125.63
78.0	103.74	70°	103.74	393.12	126.44
78.5	104.40	70°	104.40	395.64	127.25
79.0	105.07	70°	105.07	398.16	128.06
79.5	105.73	70°	105.73	400.68	128.87
80.0	106.40	70°	106.40	403.20	129.68
80.5	107.06	70°	107.06	405.72	130.49
81.0	107.73	70°	107.73	408.24	131.30
81.5	108.39	70°	108.39	410.76	132.11
82.0	109.06	70°	109.06	413.28	132.92
82.5	109.72	70°	109.72	415.80	133.73
83.0	110.39	70°	110.39	418.32	134.54
83.5	111.05	70°	111.05	420.84	135.35
84.0	111.72	70°	111.72	423.36	136.16
84.5	112.38	70°	112.38	425.88	136.97
85.0	113.05	70°	113.05	428.40	137.78
85.5	113.71	70°	113.71	430.92	138.59
86.0	114.38	70°	114.38	433.44	139.40
86.5	115.04	70°	115.04	435.96	140.21
87.0	115.71	70°	115.71	438.48	141.02
87.5	116.37	70°	116.37	441.00	141.83
88.0	117.04	70°	117.04	443.52	142.64
88.5	117.70	70°	117.70	446.04	143.45
89.0	118.37	70°	118.37	448.56	144.26
89.5	119.03	70°	119.03	451.08	145.07
90.0	119.70	70°	119.70	453.60	145.88
90.5	120.36	70°	120.36	456.12	146.69
91.0	121.03	70°	121.03	458.64	147.50
91.5	121.69	70°	121.69	461.16	148.31
92.0	122.36	70°	122.36	463.68	149.12

Pixo Line 1500 UGR19 830 Black

Code article 0007827

SYLVANIA



Données générales

Nom du produit	Pixo Line 1500 UGR19 830 Black
Technologie	LED
Cap/Base	N/A
Montage	Track mounting
General application	Retail, Hospitality, Museums & Galleries, Office
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC000996
Numéro virtuel FI	4279413
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	7300
Luminaire efficacy (lm/W)	146
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	Not applicable

Caractéristiques électriques

Consommation électrique totale (W)	50
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Electrical protection	Class III
Dimmable	No
Dimming method	N/A
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	N/A

Durée de vie

Lifespan L70 B50	90000
Lifespan L70 B20	90000
Lifespan L70 B10	90000
Lifespan L80 B50	90000
Lifespan L80 B20	79000
Lifespan L80 B10	76000
Lifespan L90 B50	43000
Lifespan L90 B20	37000
Lifespan L90 B10	36000

Pixo Line 1500 UGR19 830 Black

Code article 0007827



Données physiques

Housing colour	Black
IP rating	IP20
IK rating	IK03
Longueur (mm)	1464
Largeur (mm)	37
Nominal Product Height (mm)	37.4
Poids (kg)	0.9

Emballage

Product EAN number	5410288078274
Longueur simple de l'emballage (cm)	147.0
Largeur simple de l'emballage (cm)	4.3
Packaging single depth (cm)	4.3
DUN14 (inner)	15410288078271
Units per outer package	10
Packaging outer length / height (cm)	149.0
Packaging outer width (cm)	24.0
Packaging outer depth (cm)	11.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40