



PRO

TM

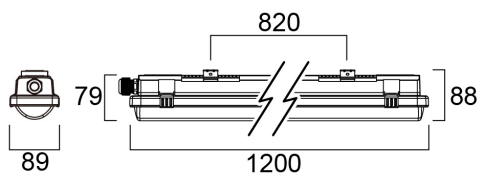

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	1.35 1.32	106.8°	1.35 1.32	4.43 4.33	6241 6073
1.0	2.69 2.63	106.8°	2.69 2.63	8.84 8.61	1565 1515
1.5	4.04 3.95	106.8°	4.04 3.95	13.26 12.92	708 688
2.0	5.39 5.27	106.8°	5.39 5.27	17.67 17.21	395 382
2.5	6.73 6.59	106.8°	6.73 6.59	22.08 21.57	251 244
3.0	8.08 7.90	106.8°	8.08 7.90	26.49 25.88	179 174





--	--