

# ToLED<sub>o</sub> NEOS T8 CCG L1500 2300LM 865 30K RL

Code article 0030235


**SYLVANIA**



Energy efficient and affordable LED T8 solution to replace conventional fluorescent T8 lamps Omni-directional uniform light distribution thanks to glass tube construction design, same as traditional fluorescent T8 tubes Lumen output - 2300lm High lumen efficacy - 135 lm/W Switching cycles - 200,000X Average rated life 30,000 hours Lamp length - 1500mm Wide beam angle Suitable for general illumination in offices, supermarkets, department stores, parking lots Suitable for operation with electromagnetic gears/CCG and direct mains operation (220-240V) 3-Year warranty

## Atouts techniques

### Dimensions (mm)

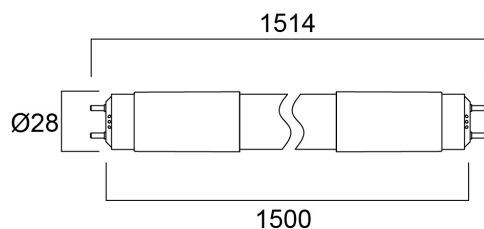

### Photométrie

# ToLED<sub>o</sub> NEOS T8 CCG L1500 2300LM 865 30K RL

Code article 0030235

**SYLVANIA**

## Données générales

Nom du produit	ToLED <sub>o</sub> NEOS T8 CCG L1500 2300LM 865 30K RL
Technologie	LED
Lamp shape	Tube, double-ended
Cap/Base	G13
Lamp finish	Frosted/Coated
General application	Education, Logistics & Industry, Office, Residential & Consumer
Operating temperature range (°C)	-20°C...+45°C
Virtual assistant compatibility	N/A
ETIM Class	EC001959
Numéro virtuel FI	4941340
Warranty	3 ans

## Données optiques

Useful luminous flux (Φ <sub>use</sub> )	2300
Température de couleur (K)	6500
Couleur de lumière	Daylight
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	170
Photobiological Risk Group	RG0

## Caractéristiques électriques

Power consumption (W)	17
Wattage (W)	17
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.5
Control gear required	No
Dimmable	No
Courant d'appel (A)	12.3
Inrush Duration (µs)	29
Lamp Energy Label (class)	D
Nominal Frequency (Hz)	50/60Hz

## Durée de vie

Lifespan L70 B50	30000
------------------	-------

## Données physiques

IP rating	IP20
Longueur (mm)	1499
Nominal Product Diameter (mm)	28
Poids (kg)	0.28

## Emballage

Product EAN number	5410288302355
Longueur simple de l'emballage (cm)	156.0
Largeur simple de l'emballage (cm)	2.8
Packaging single depth (cm)	2.8
DUN14 (inner)	15410288302352
Units per outer package	10
Packaging outer length / height (cm)	159.5
Packaging outer width (cm)	16.0
Packaging outer depth (cm)	8.1

## Sécurité

Condition de fonctionnement optimal (° C)	-20-45
Consignes de nettoyage en cas de bris	Not applicable
Lampe à objectif spécial	No
Ne convient pas à l'éclairage résidentiel	Yes
Safety message	Not Suitable for totally enclosed fixtures