

ToLED_o AVANT T8 CCG L1500 2700LM 840 50K RL

Code article 0030243


SYLVANIA



Energy efficient and affordable LED T8 solution to replace conventional fluorescent T8 lamps Omni-directional uniform light distribution thanks to glass tube construction design, same as traditional fluorescent T8 tubes High lumen package - 2700lm High lumen efficacy - 150 lm/W Switching cycles - 200,000X Average life 50,000 hours lifespan Lamp length - 1500mm Wide beam angle High power factor Suitable for general illumination in offices, supermarkets, department stores, train stations, petrol stations, parking lots and maintenance free applications Suitable for operation with electromagnetic gears / CCG and direct mains operation (220-240V) 5-Year warranty

Atouts techniques

Dimensions (mm)

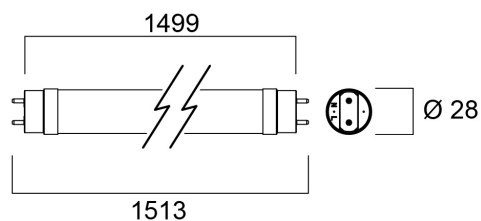

Photométrie

ToLED_o AVANT T8 CCG L1500 2700LM 840 50K RL

Code article 0030243

SYLVANIA

Données générales

| | |
|----------------------------------|---|
| Nom du produit | ToLED _o AVANT T8 CCG L1500 2700LM 840 50K RL |
| Technologie | LED |
| Lamp shape | Tube, double-ended |
| Cap/Base | G13 |
| Lamp finish | Frosted/Coated |
| General application | Hospitality, Logistics & Industry, Residential & Consumer |
| Operating temperature range (°C) | -20°C...+55°C |
| Virtual assistant compatibility | N/A |
| ETIM Class | EC001959 |
| Numéro virtuel FI | 4941348 |
| Warranty | 5 ans |

Données optiques

| | |
|--|------------|
| Useful luminous flux (Φ _{use}) | 2700 |
| Température de couleur (K) | 4000 |
| Couleur de lumière | Cool White |
| IRC (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM6 |
| Beam Angle (°) | 170 |
| Photobiological Risk Group | RG0 |

Caractéristiques électriques

| | |
|--|-------|
| Power consumption (W) | 18 |
| Wattage (W) | 18 |
| Actuel (A) | 0.109 |
| Primary Supply/Product voltage - min (V) | 220 |
| Primary Supply/Product voltage - max (V) | 240 |
| Lamp power factor | 0.9 |
| Control gear required | No |
| Dimmable | No |
| Courant d'appel (A) | 14.9 |
| Inrush Duration (µs) | 60 |
| Lamp Energy Label (class) | D |

Durée de vie

| | |
|------------------|-------|
| Lifespan L70 B50 | 50000 |
|------------------|-------|

Données physiques

| | |
|-------------------------------|-------|
| IP rating | IP20 |
| Longueur (mm) | 1499 |
| Nominal Product Diameter (mm) | 28 |
| Poids (kg) | 0.227 |

Emballage

| | |
|--------------------------------------|----------------|
| Product EAN number | 5410288302430 |
| Longueur simple de l'emballage (cm) | 155.2 |
| Largeur simple de l'emballage (cm) | 2.9 |
| Packaging single depth (cm) | 2.9 |
| DUN14 (inner) | 15410288302437 |
| Units per outer package | 10 |
| Packaging outer length / height (cm) | 160.7 |
| Packaging outer width (cm) | 22.5 |
| Packaging outer depth (cm) | 10.5 |

Sécurité

| | |
|---|---------------------------------------|
| Condition de fonctionnement optimal (° C) | -20-55 |
| Consignes de nettoyage en cas de bris | Not applicable |
| Lampe à objectif spécial | No |
| Ne convient pas à l'éclairage résidentiel | Yes |
| Safety message | Suitable for totally enclosed fixture |