

START Downlight 225 IP54 2350lm 830

Code article 0030330

SYLVANIA


STARTTM



Ceiling recessed LED downlight IP54 (from the front), perfect where limited ceiling void is available with only 65mm product depth and 225mm cutout. Ideal replacement for 2x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 23W, 3000K, Driver Current: 630mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP54 from the front, IK07, (HxW) 65x225mm, Class 2, 220-240V. Meets TP(a) requirements.


Atouts techniques

Dimensions (mm)

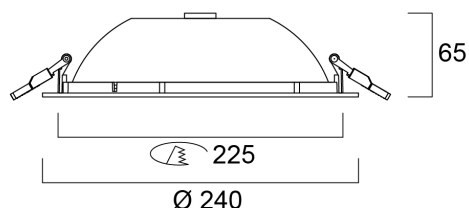

Photométrie

		50° E/C0 39.2°	50° E/C0 39.2°
0.5	0.82	50° E/C0 39.2°	50° E/C0 39.2°
1.0	1.64	50° E/C0 39.2°	50° E/C0 39.2°
1.5	2.46	50° E/C0 39.2°	50° E/C0 39.2°
2.0	3.27	50° E/C0 39.2°	50° E/C0 39.2°
2.5	4.09	50° E/C0 39.2°	50° E/C0 39.2°
3.0	4.91	50° E/C0 39.2°	50° E/C0 39.2°
Distance [m]	Cone diameter [m]	Illuminance [lx]	
C0 - C180 (half beam angle: 74.6°)			



START Downlight 225 IP54 2350lm 830

Code article 0030330

SYLVANIA

Données générales

Nom du produit	START Downlight 225 IP54 2350lm 830
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Hospitality, Logistics & Industry, Office
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	40
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Numéro virtuel FI	4278155
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	2350
Luminaire efficacy (lm/W)	102
LOR (%)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Chromaticité réglable	N
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	23
Actuel (A)	0.100
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class II
Control gear required	No
Type d'appareillage	LED driver constant current
No. Of switching cycles before premature failures	>100000
Dimmable	No
Dimming method	N/A
Drive current (mA)	630
Courant d'appel (A)	6.44
Inrush Duration (µs)	830
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	11
Max. products per 13A C Breaker	14
Max. products per 16A C Breaker	17
Max. products per 20A C Breaker	22
Max. products per 10A B Breaker	7
Max. products per 13A B Breaker	9
Max. products per 16A B Breaker	11
Max. products per 20A B Breaker	14
Connectable conductor cross section - Min (mm²)	0.5
Connectable conductor cross section - Max (mm²)	1.5

START Downlight 225 IP54 2350lm 830

Code article 0030330



Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

Données physiques

Housing colour	RAL 9010 - Pure white
IP rating	IP54/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Nominal Product Height (mm)	65
Nominal Product Diameter (mm)	240
Poids (kg)	0.528
Recessed Depth (mm)	150

Emballage

Product EAN number	5410288303307
Longueur simple de l'emballage (cm)	24.5
Largeur simple de l'emballage (cm)	24.5
Packaging single depth (cm)	8.0
DUN14 (inner)	15410288303304
Units per outer package	12
Packaging outer length / height (cm)	50.0
Packaging outer width (cm)	51.0
Packaging outer depth (cm)	27.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-10-40