


# Insaver UGR19 IP54 150 1200LM 840 SSA01D

Code article 0030621

**SYLVANIA**


**PRO**<sup>TM</sup>

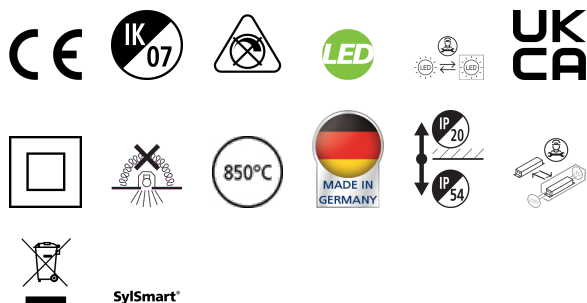



Insaver is a ceiling recessed LED downlight (IP54 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Sylsmart driver SSA01D, 9.5W; 1200lm; 126lm/W; 4000K; UGR <19 with shallow product depth 50mm. Meets TP(a) requirements.

## Atouts techniques

### Dimensions (mm)

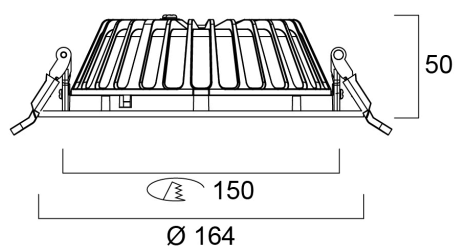

### Photométrie



# Insaver UGR19 IP54 150 1200LM 840 SSA01D

Code article 0030621

**SYLVANIA**

## Données générales

Nom du produit	Insaver UGR19 IP54 150 1200LM 840 SSA01D
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Hospitality, Office, Retail
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	1200
Luminaire efficacy (lm/W)	126
Température de couleur (K)	3000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	70
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

## Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	9.5
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20.0
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	290
Courant d'appel (A)	15
Inrush Duration (µs)	104
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	66
Max. products per 16A C Breaker	96
Max. products per 16A B Breaker	77
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.75
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

# Insaver UGR19 IP54 150 1200LM 840 SSA01D

Code article 0030621

**SYLVANIA**

## Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	100000
Lifespan L80 B20	88000
Lifespan L80 B10	80000
Lifespan L90 B50	50000
Lifespan L90 B20	43000
Lifespan L90 B10	39000

## Données physiques

Housing colour	RAL 9010 - Pure white
IP rating	IP54/20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Finition réflecteur	Not Applicable
Nominal Product Height (mm)	50
Nominal Product Diameter (mm)	165
Built-in diameter (mm)	150
Poids (kg)	0.45

## Emballage

Product EAN number	5410288306216
Longueur simple de l'emballage (cm)	17.8
Largeur simple de l'emballage (cm)	17.8
Packaging single depth (cm)	7.0
DUN14 (inner)	15410288306213
Units per outer package	20
Packaging outer length / height (cm)	37.0
Packaging outer width (cm)	37.0
Packaging outer depth (cm)	37.0

## Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-20-40