

ToLEDo RT G9 V2 CL 250LM 865 SL

Code article 0030787


SYLVANIA



LED retrofit replacement for halogen G9 mains voltage capsules ToLEDo Retro G9 has the same look and feel as halogen design thanks to glass construction body and wide light distribution Compact design Omni-directional light distribution High lumen efficacy: up to 131lm/W Up to 91% energy saving Dimmable and non-dimmable versions Suitable for chandeliers, interior display, shop windows, decorative and general lighting applications

Atouts techniques

Dimensions (mm)

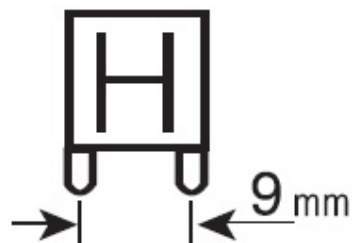

Photométrie

ToLEDo RT G9 V2 CL 250LM 865 SL

Code article 0030787

SYLVANIA

Données générales

| | |
|----------------------------------|-------------------------------------|
| Nom du produit | ToLEDo RT G9 V2 CL 250LM 865 SL |
| Technologie | LED |
| Lamp shape | Capsule |
| Cap/Base | G9 |
| Lamp finish | Clear |
| Built in presence detector | NONE |
| Fixture rating | Open |
| General application | Hospitality, Residential & Consumer |
| Operating temperature range (°C) | -20°C...+40°C |
| Virtual assistant compatibility | N/A |
| ETIM Class | EC001959 |
| Numéro virtuel FI | 4741208 |
| Warranty | 3 ans |

Données optiques

| | |
|---------------------------------------|----------|
| Useful luminous flux (Φ_{use}) | 250 |
| Température de couleur (K) | 6500 |
| Couleur de lumière | Daylight |
| IRC (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM6 |
| Beam Angle (°) | 285 |
| Photobiological Risk Group | RG1 |

Caractéristiques électriques

| | |
|---|-----------------------------|
| Power consumption (W) | 2.3 |
| Wattage (W) | 2.3 |
| Equivalent watt (W) | 25 |
| Actuel (A) | 0.025 |
| Primary Supply/Product voltage - min (V) | 220.0 |
| Primary Supply/Product voltage - max (V) | 240.0 |
| Control gear required | No |
| Type d'appareillage | LED driver constant current |
| No. Of switching cycles before premature failures | >50000 |
| Dimmable | No |
| Dimming method | N/A |
| Courant d'appel (A) | 9.44 |
| Inrush Duration (μ s) | 7100 |
| Lamp Energy Label (class) | F |
| Nominal Frequency (Hz) | 50/60Hz |

Durée de vie

| | |
|------------------|-------|
| Lifespan L70 B50 | 15000 |
|------------------|-------|

Données physiques

| | |
|-------------------------------|-------------|
| Housing colour | Transparent |
| IP rating | IP20 |
| Nominal Product Height (mm) | 52.5 |
| Nominal Product Diameter (mm) | 15 |
| Poids (kg) | 0.008 |

ToLEDo RT G9 V2 CL 250LM 865 SL

Code article 0030787

SYLVANIA

Emballage

| | |
|--------------------------------------|----------------|
| Product EAN number | 5410288307879 |
| Longueur simple de l'emballage (cm) | 6.1 |
| Largeur simple de l'emballage (cm) | 5.1 |
| Packaging single depth (cm) | 8.2 |
| DUN14 (inner) | 15410288307876 |
| Units per outer package | 6 |
| Packaging outer length / height (cm) | 19.5 |
| Packaging outer width (cm) | 11.0 |
| Packaging outer depth (cm) | 9.5 |

Sécurité

| | |
|---|--|
| Condition de fonctionnement optimal (° C) | -20-40 |
| Consignes de nettoyage en cas de bris | Not applicable |
| Lampe à objectif spécial | No |
| Utilisation pour applications sèches uniquement | Yes |
| Ne convient pas à l'éclairage résidentiel | Yes |
| Safety message | Not Suitable for totally enclosed fixtures |